

# SATURNUS



GP-12(50:1,0.85L/Min,12L)



GP-12A(50:1,0.85L/Min,12L)



GP-12B(50:1,0.85L/Min,12L)

GP-12,12A,12B Air-operated grease pump specification	
Pressure ratio	50:1
Compressed air	0.6~0.8MPa
Transmission Pressure	30-45MPa
Grease transmission velocity	0.85 L/Min
G.W	14Kg, 20Kg,21Kg
	320X360X850mm
CTN Size	540X540X360mm
	885X460X460mm
Grease Gun	HCG-200

## Product Features:



Seal ring-High quality Dichta(HNBR),brings long life and durability



Piston pole has passed the high level hardness ferrous metals testing





# SATURNUS

## Product Features:

High reliability, Above average performance, easy operation

Used in the mining industry, Auto truck and Industrial machines



GP-12H (12L)




GP-12F (12L)

### GP-12H,12F Hand&Foot grease pump specification

Model	GP-12h	GP-12F
Pressure ratio	---	---
Transmission Pressure	20-25 MPa	20-25 MPa
Grease transmission velocity	0.005Kg/stroke	0.005Kg/stroke
Barrel Size	12L	12L
G.W	15Kg	15Kg
CTN Size	540X540X360mm	540X540X360mm
Grease Gun	HCG-100	HCG-100



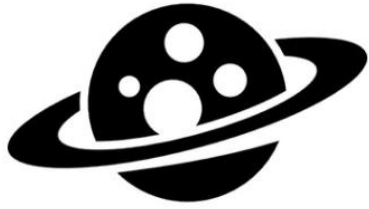

# SATURNUS



GP-20



GP-20A



GP-20B

## GP-20,20A,20B Air-operated grease pump specification

Pressure ratio	50:1
Compressed air	0.6~0.8MPa
Transmission Pressure	30-45MPa
Grease transmission velocity	0.85 L/Min
Barrel Size	20L
G.W	21Kg, 20Kg, 21Kg
CTN Size	885 X 460 X 460mm
	835 X 460 X 460mm
Grease Gun	HCG-200

### Product Features:

Advanced technology from Japan, with great performance and low maintenance.





# SATURNUS



GP-50A(45L)



GP-50B(45L)




GP-50C(45L)


## GP-50A,50B,50C Air-operated grease pump specification

Pressure ratio	50:1
Compressed air	0.6~0.8MPa
Transmission Pressure	30-45MPa
Grease transmission velocity	0.85 L/Min
Barrel Size	45L,45L, 45L
G.W	24Kg, 24Kg,28Kg
	320X360X850mm
CTN Size	835X460X460mm
	835X460X460mm
Grease Gun	HCG-200

## Product Features:

Advanced technology from Japan, with great performance and low maintenance.



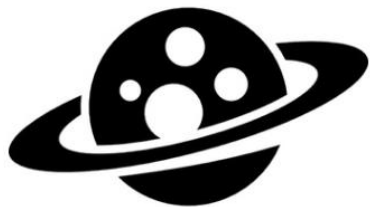

# SATURNUS

Suitable for distribution and transfer all kinds of grease in short and long distance  
 Long Life, easy to maintain.  
 Designed for manufacturing or automotive service facilities  
 High flow capability, stable function



**Ratio: 50:1**  
**Flow Rate: 800g/min**

Model	62041	62048	62073	62094
Pressure Ratio	50:1			
Air Inlet Connection	1/4 Quick plug			
Oil Inlet Connection	1/4 MBSP			
Working Pressure	8 Bar	8 Bar	8 Bar	8 Bar
Max Flow Pressure	400 Bar	400 Bar	400 Bar	400 Bar
Air Consumption	120L/min	120L/min	120L/min	120L/min
Relative Capacity	800g/min	800g/min	800g/min	800g/min
Suction Tube I.D.	30mm	30mm	30mm	30mm
Suction Tube Length	410mm	480mm	730mm	940mm





# SATURNUS

## 4.3 Accessories for Grease pumps- Grease Gun



**Art. 66860M**  
Grease Gun with flexible terminal  
-Inlet 1/4" M  
-Single swivel joint  
-With special 4-jaw grease coupler



**Art. 66860**  
Grease Gun with flexible terminal  
-Inlet 1/4" F  
-Single swivel joint  
-With special 4-jaw grease coupler



**Art. 66889M**  
Grease Gun with flexible terminal  
-Inlet 1/4" M  
-Single swivel joint  
-With special 4-jaw grease coupler

**Art. 66889**  
Grease Gun with flexible terminal  
-Inlet 1/4" F  
-Single swivel joint  
-With special 4-jaw grease coupler



**Art. 66855**  
- Inlet 1/4" M  
- Single swivel joint



**Art. 66851**  
Spearhead



**Art. 66856**  
Flexible terminal  
With special 4-jaw grease oupler



**Art. 66857** Rigid terminal  
With special 4-jaw grease coupler



**Art. 66881M**  
Grease Gun with flexible terminal  
-Inlet 1/4" M  
-Single swivel joint  
-With special 4-jaw grease coupler

**Art. 66881**  
Grease Gun with flexible terminal  
-Inlet 1/4" F  
-Single swivel joint  
-With special 4-jaw grease coupler



**Art. 66882M**  
Grease Gun with flexible terminal  
-Inlet 1/4" M  
-Single swivel joint  
-With special 4-jaw grease coupler

**Art. 66882**  
Grease Gun with flexible terminal  
-Inlet 1/4" F  
-Single swivel joint  
-With special 4-jaw grease coupler




**66661F**  
Straight single swivel joint

**66663F**  
Triple swivel joint 1/4" G F/F

**66661**  
Straight single swivel joint 1/4" G M/M

**66663**  
Triple swivel joint 1/4" G M/F



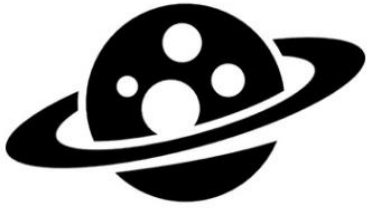

# SATURNUS

## 3.2 Manual Grease Pumps

Portable high pressure 350-400bar manual grease pumps. Practical and functional, they can be used in all workplaces, and in particular on rough ground such as in farming or building sites. They enable easy change of the grease container (drum or bucket) and quick greasing on any motor vehicle or mechanism.



Model	61280	61310	60280	60310
Suitable for drums	12-20Kg	16-30Kg	12-20Kg	16-30Kg
Drum Cover	280mm	310mm	280mm	310mm
Follower Plate	365mm	310mm	365mm	310mm
Hose Reel	1/4"*2.5m		1/4"*2.5m	
Grease Gun	Rigid terminal with 4-jaw grease head			
Net weight	11.4Kg	11.5Kg	6.4Kg	6.5Kg
Package	2PCS	2PCS	1PCS	1PCS





# SATURNUS



## 6.2 Oil Dispenser Unit With 65L tank

Trolley-mounted oil dispenser kit. The ideal combination for dispensing oil in any workplace. The compact trolley has 2 fixed wheels and 2 castors that make it very easy to handle. It is equipped with a pump support and is suitable for various types of oil.



Model	35270	37670	35265	37650
Oil Pump	3:1 18L/min	5:1 14L/min	3:1 18L/Min	5:1 14L/Min
Digital Oil Gun	—		G935656	
Oil Hose	A176206.004 1/2" *4m			
Nipple	1/2" G M/M			

