


Power Tools Programme 2018 / 2019

1st Edition January 2018

For professionals from professionals.

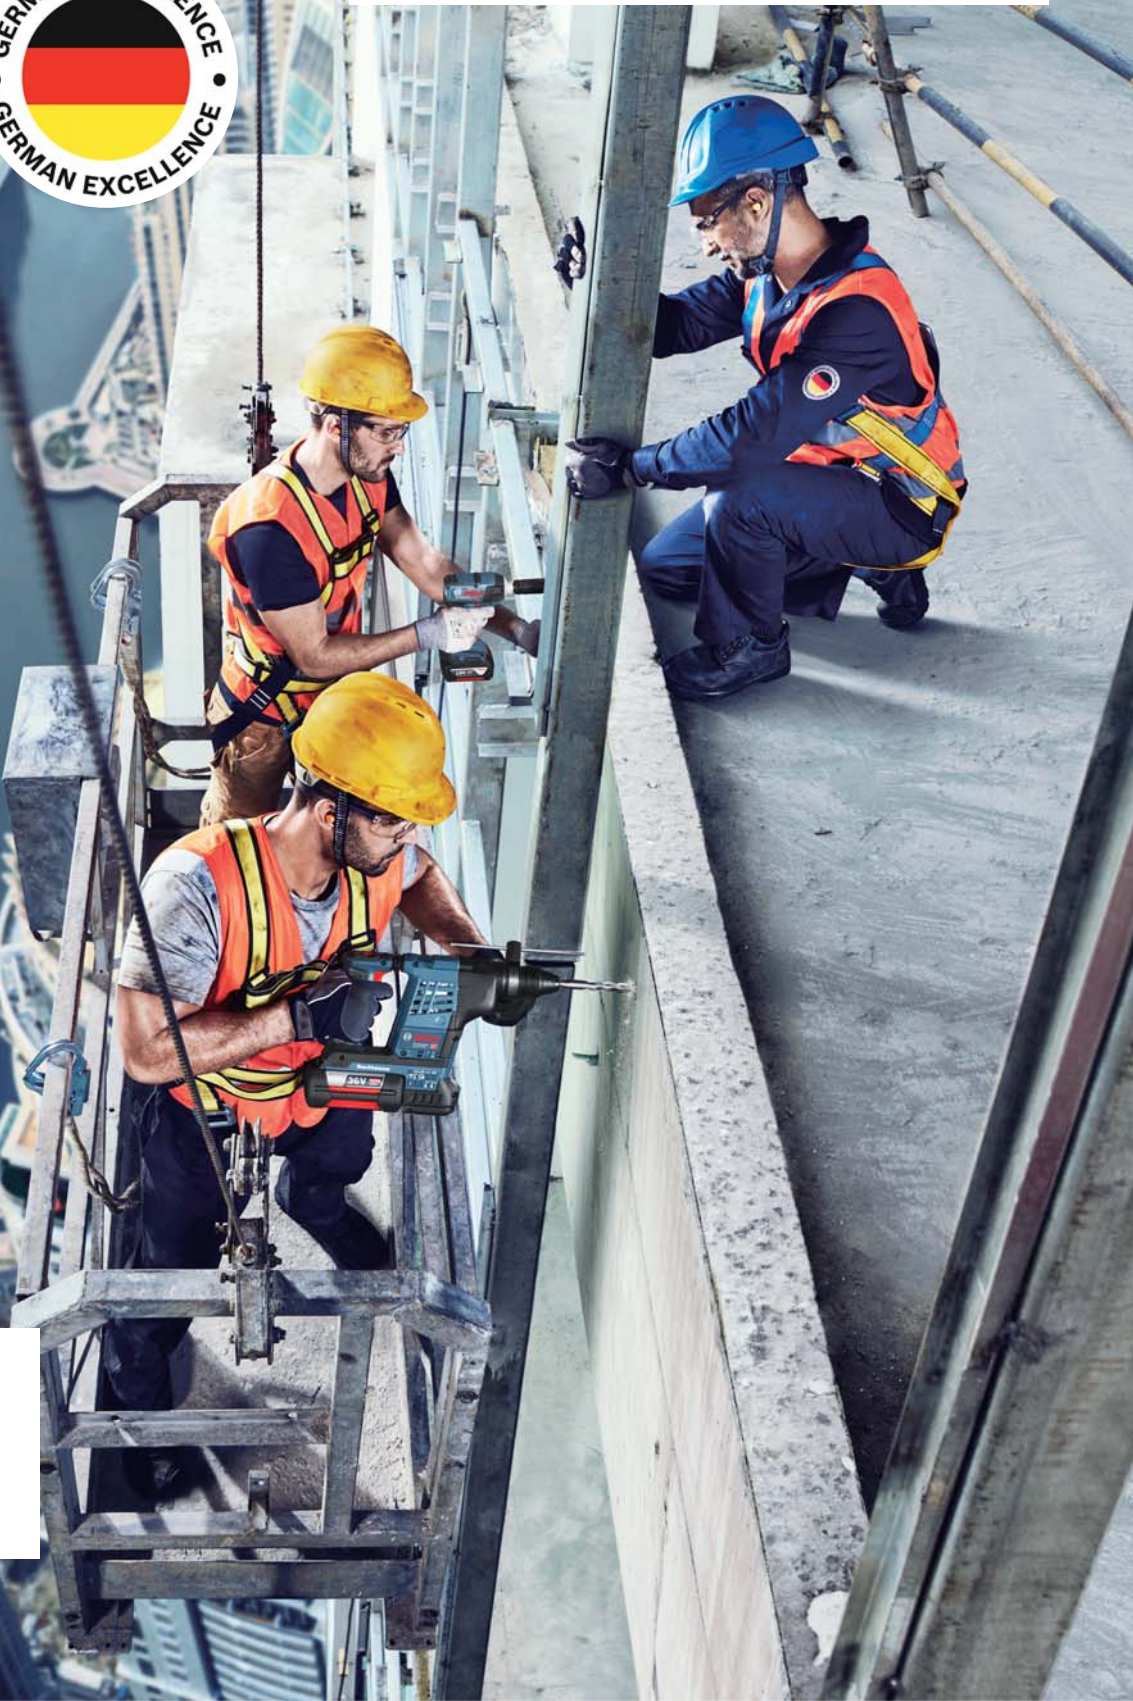

BOSCH

Invented for life

Contents

Professional Power Tools Range

PG
6 - 18



Contractor's Choice Range

PG
19 - 21



Measuring Tools Range

PG
22 - 25



Home & Garden Range

PG
26 - 27



BOSCH
Invented for life

Designed to outlast all your demands

Bosch Heavy Duty - Power, Performance and Robustness redefined!

We deliver unmatched endurance coupled with reliability and world-class performance. All Bosch products are powered by innovation and technology engineered to outlast customer expectations.

Every tool in the Bosch Heavy Duty Range comes with a one-year warranty.

**HEAVY
DUTY**

**1 year
warranty***



BOSCH
Invented for life

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

18 V Cordless Freedom Concept

**HEAVY
DUTY**

**1 year
warranty**




FREEDOM TO CHOOSE

Save cost and time with the Bosch Cordless System



BOSCH
Invented for life



BARE TOOLS, BATTERIES, CHARGERS AND CASES ARE SOLD SEPARATELY,
GIVING YOU THE FREEDOM TO CHOOSE THE COMBINATION THAT YOU NEED

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

EC Brushless Motor Range

**HEAVY
DUTY**

**1 year
warranty**

**Cordless
Drill / Screwdriver**
GSR 12 V-EC

**Cordless
Impact Driver**
GDR 12 V-EC

**Cordless
Drill / Driver**
GSR 18 V-EC (Solo)**

**Cordless
Angle Grinder**
GWS 12-76 V-EC (Solo)**

**Cordless
Multi-Cutter**
GOP 12 V-28 (Solo)**

**EC Brushless Motor
Range**

**Cordless
Impact Drill**
GSB 18 V-EC (Solo)**

**Longer runtime
Longer lifetime**

**Cordless Impact
Wrench / Driver**
GDH 18 V-EC

**Cordless Rotary
Hammer**
GBH 36 V-EC Compact




**Cordless
Multi-Cutter**
GOP 18 V-EC (Solo)**

**Cordless Rotary
Hammer**
GBH 18 V-26 (Solo)**

**Cordless
Sabre Saw**
GSA 18 V-32 (Solo)**

Up to **30% MORE
RUNTIME**

*Compared to Bosch power tools with DC motor of same class

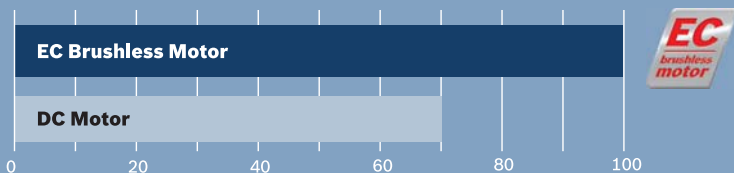

Less maintenance effort!

How it works



EC Brushless Motor
No brush sparking due to electrical switch by electronics.



DC Motor
Brush sparking at every mechanical switch operation

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.
** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

3.6 V Li-Ion

IXO 3
Cordless Screwdriver
(0 601 960 2L0)



Capacity	
Max. Screw Dia.	: 5 mm
Max. Torque	: 4 Nm
No-load Speed	: 0 - 180 rpm
Battery Voltage	: 3.6 V / 1.3 Ah
Charger	: AL 1115 CV
Charging Time	: about 5 hours
Weight	: 0.3 kg

GSR 3,6 V-LI ProDrive
Cordless Screwdriver
(0 601 9A2 0L1)



Capacity	
Max. Screw Dia.	: 5 mm
Max. Torque	: 7 Nm
No-load Speed	: 0 - 250 rpm
Battery Voltage	: 3.6 V / 1.3 Ah
Charger	: AL 1115 CV
Charging Time	: 60 mins
Weight	: 0.5 kg

GSR 3,6 V-LI BitDrive
Cordless Screwdriver
(0 601 9D3 0L0)



Capacity	
Max. Screw Dia.	: 5 mm
Max. Torque	: 4.5 Nm
No-load Speed	: 210 rpm
Battery Voltage	: 3.6 V / 1.5 Ah
Charger	: Micro USB
Charging Time	: 4 hours
Weight	: 0.5 kg

12 V Li-Ion

GSR 12-2-LI
Cordless Drill / Driver
(0 601 868 1LA)



Capacity	
Drilling Dia.: In Steel	: 10 mm
In Wood	: 19 mm
Max. Torque	: 30 Nm
No-load Speed	: 0 - 350 / 1,300 rpm
Battery Voltage	: 12 V / 2.0 Ah
Charger	: GAL 1230 CV
Charging Time	: 35 mins
Weight	: 0.95 kg

GSR 12 V-EC
Cordless Drill / Driver
(0 601 9D4 0L2)



Capacity	
Drilling Dia.: In Steel	: 10 mm
In Wood	: 30 mm
Max. Torque (hard/soft)	: 20 / 18 Nm
No-load Speed	: 0 - 400 / 1,300 rpm
Battery Voltage	: 12 V / 2.0 Ah
Charger	: GAL 1230 CV
Charging Time	: 45 mins
Weight	: 0.9 kg

GSR 12 V-15 FC
Cordless Drill / Driver
(0 601 9F6 0L0)



Capacity	
Drilling Dia.: In Steel	: 10 mm
In Wood	: 19 mm
Max. Torque (hard/soft)	: 30 / 15 Nm
No-load Speed	: 0 - 400 / 1,300 rpm
Battery Voltage	: 12 V / 2.0 Ah
Chuck Capacity	: 10 mm
Charging Time	: 45 mins
Charger	: AL 1230 CV
Weight	: 0.6 kg

GDR 12 V-LI
Cordless Impact Driver
(0 601 9A6 9L7)



Capacity	
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 2,600 rpm
Impact Rate	: 0 - 3,100 bpm
Max. Torque	: 105 Nm
Battery Voltage	: 12 V / 2.0 Ah
Charger	: AL 1230 CV
Charging Time	: 45 mins
Weight	: 0.96 kg

GDR 12 V-EC
Cordless Impact Driver
(0 601 9E0 0L2)



Capacity	
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 1,200 / 2,600 rpm
Impact Rate	: 0 - 2,700 / 3,100 bpm
Max. Torque	: 110 Nm
Battery Voltage	: 12 V / 2.0 Ah
Charger	: GAL 1230 CV
Charging Time	: 45 mins
Weight	: 0.95 kg

GOP 12 V-28 (Solo)**
Cordless Multi-Cutter
(0 601 8B5 0L0)



Capacity	
Oscillation Angle on Left / Right	: 1.4°
No-load Speed	: 5,000 - 20,000 rpm
Weight	: 0.81 kg

GSA 12 V-LI (Solo)**
Cordless Sabre Saw
(0 601 64L 9L2)



Capacity	
Stroke speed	: 0 - 3,000 min
Stroke Length	: 14.5 mm
Pipe Diameter	: 50 mm
Wood	: 65 mm

GST 12 V-LI (Solo)**
Cordless Jigsaw
(0 601 5A1 0L1)



Capacity	
No-load Stroke Rate	: 1,500 - 2,800 spm
Stroke Length	: 18 mm
Cutting Capacity	
- in Wood	: 70 mm
- in Aluminium	: 3 mm
- in Non-alloy Steel	: 3 mm
Weight	: 1.5 kg

GWS 12-76 V-EC (Solo)**
Cordless Angle Grinder
(0 601 9F2 000)



Capacity	
No-load Speed	: 19,500 rpm
Grinding Spindle Thread	: M5
Bore Size, Diameter	: 10 mm
Weight	: 0.9 kg

GKS 12 V-LI (Solo)**
Cordless Circular Saw
(0 601 6A1 0L2)



Capacity	
No-load Speed	: 1,400 rpm
Depth of Cut - 90°	: 26.5 mm
Bore Diameter	: 15 mm
Max. Bevel	: 45°
Weight	: 1.4 kg

GAS 12 V-LI (Solo)**
Cordless Vacuum Cleaner
(0 601 9E3 081)



Capacity	
Container Volume	: 0.35 l
Filter Surface	: 408 cm²
Max. Volume Flow Rate	: 15 l/sec
Max. Volume Pressure	: 45 mbar
Weight	: 0.9 kg

14.4 V Li-Ion

GDR 1440-LI
Cordless Impact Driver
(0 601 9B3 4L1)



Capacity	
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0-2,900 rpm
Impact Rate	: 0-3,200 bpm
Max. torque	: 130 Nm
Battery Voltage	: 14.4 V / 1.5 Ah
Charger	: AL 1814 CV
Charging Time	: 60 mins
Weight	: 1.2 kg

18 V Li-Ion

GDX 18 V-EC
Cordless Impact Wrench / Driver
(0 601 9B9 1L0)



Capacity	
Tool Holder	: Hex & Square
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,200 bpm
Max. Torque	: 185 Nm
Battery Voltage	: 18 V / 4.0 Ah
Charger	: AL 1860 CV
Weight	: 1.7 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.
** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

18 V Li-Ion

GSB 18-2-LI Cordless Impact Drill (0 601 9D2 3L1)



HEAVY DUTY 1 year warranty*

AUTO LOCK

Capacity	
Drilling Dia.: In Steel	: 10 mm
In Wood	: 30 mm
In Masonry	: 10 mm
Max. torque (hard/Soft)	: 39 / 18 Nm
Chuck Capacity	: 10 mm
Torque Settings	: 20+1
Battery Voltage	: 18 V / 2.0 Ah
Charger	: AL 1820 CV
Weight	: 1.5 kg

GSB 18 V-EC (Solo)** Cordless Impact Drill (0 601 9E9 100)



HEAVY DUTY 1 year warranty*

EC

Capacity	
Drilling Dia.: In Steel	: 13 mm
In Wood	: 38 mm
In Masonry	: 13 mm
Max. torque (hard/Soft)	: 50 / 31 Nm
No-load Speed	: 0-600/1,900 rpm
Chuck Capacity	: 13 mm
Torque Settings	: 20+1
Max. Impact Rate	: 25,500 bpm
Weight	: 1.5 kg

GSR 18 V-EC (Solo)** Cordless Drill / Driver (0 601 9E8 100)



HEAVY DUTY 1 year warranty*

EC

Capacity	
Drilling Dia.: In Steel	: 13 mm
In Wood	: 38 mm
Max. torque (hard/soft)	: 50 / 31 Nm
Chuck Capacity	: 13 mm
No-load Speed	: 0-600 / 1,900 rpm
Torque Settings	: 20+1
Weight	: 1.5 kg

GSR 18-2-LI (Solo)** Cordless Drill / Driver (0 601 9B7 3B2)



HEAVY DUTY 1 year warranty*

AUTO LOCK

Capacity	
Drilling Dia.: In Steel	: 10 mm
In Wood	: 30 mm
Max. torque (hard/soft)	: 38 / 17 Nm
Chuck Capacity	: 10 mm
No-load Speed	: 0-400 / 1,300 rpm
Torque Settings	: 20+1
Weight	: 1.3 kg

GDS 18 V-LI HT (Solo)** Cordless Impact Wrench (0 601 9A1 3L4)



HEAVY DUTY 1 year warranty*

Capacity	
Torque Max.	: 650 Nm
No-load Speed	: 0 - 1,900 rpm
Impact Rate	: 0 - 2,100 bpm
Screw Diameter	: M12 - M20
Toolholder	: 1/2" External Square
Weight	: 3.0 kg

GSA 18 V-LI (Solo)** Cordless Sabre Saw (0 601 64J 0B1)



HEAVY DUTY 1 year warranty*

EC

Capacity	
Stroke Length	: 28 mm
No-load Stroke Rate	: 0 - 2,400 / 0 - 2,700 spm
Rate	: 0 - 2,400 / 0 - 2,700 spm
Weight	: 3.4 kg

GSA 18 V-32 (Solo)** Cordless Sabre Saw (0 601 6A8 102)



HEAVY DUTY 1 year warranty*

EC

Capacity	
Stroke Length	: 32 mm
No-load Stroke Rate	: 0 - 2,500 spm
Cutting Depth In Wood	: 230 mm
In Metal	: 175 mm
Weight	: 3.5 kg

GST 18 V-LI B (Solo)** Cordless Jigsaw (0 601 5A6 100)



HEAVY DUTY 1 year warranty*

Capacity	
No-load Stroke Rate	: 0 - 2700 spm
Stroke Height	: 23 mm
Cutting Depth In Metal	: 8 mm
In Wood	: 120 mm
In Aluminium	: 120 mm
Slanted Cuts	: 0 - 45°
Weight Incl. Battery	: 2.4 kg

GKS 18 V-57 (Solo)** Cordless Circular Saw (0 601 6A2 2L0)



HEAVY DUTY 1 year warranty*

Capacity	
No-load Speed	: 3,400 rpm
Blade Diameter	: 165 mm
Saw Blade Bore Diameter	: 20 mm
Max. Cutting Capacities at 90°	: 57 mm
at 45°	: 42 mm
Weight	: 4.1 kg

GKM 18 V-LI (Solo)** Cordless Metal Circular Saw (0 601 6A4 001)



HEAVY DUTY 1 year warranty*

LED LIGHT

Capacity	
No-load Speed	: 4,250 rpm
Blade Diameter	: 136 mm
Saw Blade Bore Diameter	: 20 mm
Cutting Capacity	: 50 mm
Battery Voltage	: 18 V
Cutting Depth Adjustment	: Yes

GWS 18 V-LI (Solo)** Cordless Angle Grinder (0 601 93A 3L5)



HEAVY DUTY 1 year warranty*

LED LIGHT

Capacity	
No-load Speed	: 10,000 rpm
Roughing/Cutting Disc, Diameter	: 100 mm
Weight	: 2.3 kg

GGG 18 V-LI (Solo)** Cordless Straight Grinder (0 601 9B5 300)



HEAVY DUTY 1 year warranty*

Capacity	
No-load Speed	: 2 - 22,000 rpm
Toolholder	: Collet up to 8 mm Diameter
Weight	: 1.8 kg

GAS 18 V-1 (Solo)** Cordless Vacuum Cleaner (0 601 9C6 2L0)



HEAVY DUTY 1 year warranty*

NEW!

Capacity	
Container Vol.	: 700 ml
Max. Underpressure	: 6 kPa
Max. Airflow	: 10 l/sec
Speeds	: 1 Speed
Runtime	: 7 min/Ah
Weight (w/o batt, w/o AC)	: 1.3 kg

GBL 18 V-120 (Solo)** Blower (0 601 9F5 1L0)



HEAVY DUTY 1 year warranty*

Capacity	
No-load Speed	: 17,000 rpm
Air Speed, Max	: 75 m/s
Air Volume	: 2.0 m³/min
Runtime	: Speed I: 9 min / Ah
	: Speed II: 5 min / Ah
Weight without Cable	: 1.1 kg

GCB 18 V-LI (Solo)** Cordless Band Saw (0 601 2A0 300)



HEAVY DUTY 1 year warranty*

LED LIGHT

Capacity	
No-load Speed	: 162 m/min
Saw Blade Diameter	: 733 x 12,7 x 0.5 mm
Max. Cutting Depth	: 63.5 mm
Weight	: 3.8 kg

GML 18 V-LI (Solo)** - Indent Sound Box (0 601 429 970)



HEAVY DUTY 1 year warranty*

Capacity	
Music Source	: FM / AM / Aux-In
Station Presets	: 5FM / 5AM
Loudspeaker	: 2 x 5W Neodymium
Size (H x W x L)	: 148 x 110 x 307 mm
Weight	: 1.3 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

18 V Li-Ion

GHO 18 V-LI (Solo)**
Cordless Planer
(0 601 5A0 300)

HEAVY DUTY

1 year warranty*



Capacity	
No-load Speed	: 14.000 rpm
Cutting Depth	: 0 - 1,6 mm
Rebating Depth	: 0 - 8 mm
Planing Width, Max.	: 82 mm
Weight	: 2.6 kg

GSS 18 V-LI (Solo)**
Cordless Orbital Sander
(0 601 9D0 2L0)

HEAVY DUTY

1 year warranty*



Capacity	
No-load Speed	: 11.000 rpm
Orbital Rate	: 22,000min-1
Orbital Diameter	: 1,6 mm
Pad Size	: 113 x 101 mm
Sanding Paper Size	: 114 x 140 mm
Weight	: 1.0 kg

GOP 18 V-28 (Solo)**
Cordless Multi-Cutter
(0 601 8B6 002)

HEAVY DUTY

1 year warranty*



Capacity	
Oscillation Angle	
Left/Right	: 1,4°
No-load Speed	: 8,000 - 20,000 rpm
Grip Circumference	: 193 mm
Tool Length (without battery)	: 312 mm
Weight	: 2.0 kg

GBH 18 V-26 (Solo)**
Cordless Rotary Hammer **3 mode**
(0 611 909 000)

HEAVY DUTY

1 year warranty*



Capacity	
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
Rated Speed	: 0 - 890 rpm
Impact Rate	: 0 - 4,350 bpm
Weight	: 3.5 kg

36 V Li-Ion

GBH 36 V-EC Compact
Cordless Rotary Hammer **2 mode**
(0 611 903 RL1)

HEAVY DUTY

1 year warranty*



Capacity	
In Concrete	: 4 - 18 mm
In Steel	: 13 mm
In Wood	: 30 mm
Rated Speed	: 0 - 1,500 rpm
Impact Rate	: 0 - 4,850 bpm
Battery Voltage	: 36 V / 2.0 Ah
Charger	: AL 3640 CV
Charging Time	: 45 mins
Weight	: 2.9 kg

GBH 36 V-LI Plus
Cordless Rotary Hammer **3 mode**
(0 611 906 0L0)

HEAVY DUTY

1 year warranty*



Capacity	
In Concrete	: 8 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
Joule	: 3.2 J
Impact Rate	: 0 - 4,174 bpm
Battery Voltage	: 36 V / 4.0 Ah
Charger	: AL 3680 CV
Charging Time	: 35 mins
Weight	: 4.5 kg

12 V Li-Ion Battery Pack



GBA 12 V 2.0 Ah O-B
(1 600 A00 F6X)



GBA 12 V 4.0 Ah O-B
(1 600 A00 F71)



GBA 18 V 2.0 Ah M-B
(1 600 A00 1CG)



GBA 18 V 4.0 Ah M-C
(1 600 A00 163)

Starter Kit



12 V 1.5 Ah (2 Batteries)
+ GAL 1230 CV (1 Charger)
(1 600 A00 F6J)



18 V 2.0 Ah (2 Batteries)
+ GAL 1860 CV (1 Charger)
(1 600 A00 1A2)



14.4 V 2.0 Ah (2 Batteries)
+ GAL 1860 CV (1 Charger)
(1 600 A00 1AG)



18 V 4.0 Ah (2 Batteries)
+ GAL 1860 CV (1 Charger)
(1 600 A00 1B7)

Wireless Starter Kit



18 V 2.0 Ah MW-B (1 Battery)
+ GAL 1830 W (1 Charger)
+ Mounting Frame
(1 600 A00 3NB)

L-BOXX



L-BOXX 102
(1 605 438 165)



L-BOXX 136
(1 605 438 166)

Trolley

L-BOXX Trolley (Indent)
(1 600 A00 1SA)

L-BOXX Roller (Indent)
(1 6000 A00 1S9)



L-BOXX 238
(1 605 438 167)



L-BOXX 374 (Indent)
(1 605 438 168)



Charger



GAL 1230 CV
(for 10.8 V & 12 V Battery)
(1 600 A00 F6S)



GAL 1860 CV
(for 14.4 V & 18 V Battery)
(1 600 A00 16Y)



GAX 18 V-30
(for 12 V, 14.4 V & 18 V Battery)
(1 600 A01 1AA)

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

Drill

GBM 10 RE (0 601 473 5L0)

HEAVY DUTY

1 year warranty



2 610 391 290

Capacity	
Power Input	: 450 W
In Steel	: 10 mm
In Aluminium	: 10 mm
In Wood	: 25 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.3 kg

GBM 13 RE (0 601 477 5L0)

HEAVY DUTY

1 year warranty



2 610 391 290

Capacity	
Power Input	: 600 W
In Steel	: 13 mm
In Aluminium	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.65 kg

GBM 13 HRE "High Torque" (0 601 049 603)

HEAVY DUTY

1 year warranty



1 607 031 222

Capacity	
Power Input	: 550 W
In Steel	: 13 mm
In Aluminium	: 20 mm
In Wood	: 40 mm
No-load Speed	: 0 - 550 rpm
Torque (Approx.)	: 40 Nm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.1 kg

GBM 32-4 (0 601 130 203)

HEAVY DUTY

1 year warranty



3 604 321 034

Capacity	
Power Input	: 1,500 W
In Steel	: 32 mm
In Aluminium	: 50 / 70 mm
4 Speed	: 210 / 330 / 470 / 740 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 7.3 kg

Impact Drill

GSB 10 RE (0 601 216 1L6)



2 610 391 290

Capacity	
Power Input	: 500 W
In Masonry	: 10 mm
In Steel	: 8 mm
In Wood	: 20 mm
No-load Speed	: 0 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

GSB 16 RE (0 601 228 1L2)



2 610 391 290

Capacity	
Power Input	: 750 W
In Concrete	: 16 mm
In Steel	: 12 mm
In Wood (hard)	: 25 mm
No-load Speed	: 0 - 3,250 rpm
Impact Rate	: 0 - 48,500 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GSB 20-2 RE (0 601 1A2 1L0)



1 617 000 525

Capacity	
Power Input	: 800 W
In Concrete	: 20 mm
In Steel	: 13 mm
In Wood	: 40 mm
No-load Speed	: 0 - 1,000 / 3,000 rpm
Impact Rate	: 0 - 16,000 / 48,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.6 kg

Multi Cutter

GOP 30-28 (0 601 237 0L0)



1 619 P02 870

Capacity	
Power Input	: 300W
Oscillating amplitude	: 2.8° (2 x 1.4°)
No-load Speed	: 8,000 - 20,000 opm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

Straight Grinder

GGs 3000 L (0 601 224 0L0)



1 607 031 223

Capacity	
Power Input	: 300 W
Max. Collet Capacity	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

GGs 5000 L (0 601 224 1L0)



1 607 031 223

Capacity	
Power Input	: 500 W
Max. Collet Capacity	: 8 mm
No-load Speed	: 33,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

GGs 28 LC (0 601 221 070)



1 607 014 176

Capacity	
Power Input	: 650 W
Max. Collet Diameter	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.6 kg

GGs 28 C (0 601 220 070)



1 607 014 176

Capacity	
Power Input	: 650 W
Max. Collet Diameter	: 8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

4" Angle Grinder

GWS 750-100 (0 601 394 0L0)

HEAVY DUTY

1 year warranty



1 619 P11 715

Capacity	
Power Input	: 750 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 59 / 54.5 mm
Perimeter	: 187 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GWS 900-100 (0 601 396 0L0)

HEAVY DUTY

1 year warranty



1 619 P11 715

Capacity	
Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Grinding Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

GWS 900-100 S (0 601 396 1L0)

HEAVY DUTY

1 year warranty



1 619 P11 715

Capacity	
Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Grinding Spindle Thread	: M10
No-load Speed	: 2,800 - 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.9 kg

GWS 7-100 ET (0 601 388 5L0)

HEAVY DUTY

1 year warranty



1 619 P02 870

Capacity	
Power Input	: 720 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 2,800 - 9,300 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

4" Angle Grinder

GWS 8-100 Z
(0 601 831 5L0)

HEAVY DUTY
1 year warranty



1 607 014 176

Capacity	
Power Input	: 800 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 11,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.9 kg

5" Angle Grinder

GWS 13-125 CI
(0 601 79E 002)

HEAVY DUTY
1 year warranty



1 607 000 V37

Capacity	
Power Input	: 1,300 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.3 kg

GWS 15-125 CITH (Indent)
(0 601 830 E42)

HEAVY DUTY
1 year warranty



1 607 014 176

Capacity	
Power Input	: 1,500 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

GWS 17-125 CI
(0 601 79G 002)

HEAVY DUTY
1 year warranty



1 607 000 V37

Capacity	
Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

6" Angle Grinder

GWS 17-150 CI
(0 601 79K 002)

HEAVY DUTY
1 year warranty



1 607 000 V37

Capacity	
Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 150 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

7" Angle Grinder

GWS 20-180
(0 601 849 106)

HEAVY DUTY
1 year warranty



1 607 014 171

Capacity	
Power Input	: 2,000 W
No-load Speed	: 8,500 rpm
Grinding / Cutting	
Disc Diameter	: 180 mm
Wire Cup Brush Diameter	: 100 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.2 kg

9" Angle Grinder

GWS 20-230
(0 601 850 106)

HEAVY DUTY
1 year warranty



1 607 014 171

Capacity	
Power Input	: 2,000 W
Grinding / Cutting	
Disc Diameter	: 230 mm
Wire Cup Brush Diameter	: 100 mm
No-load Speed	: 6,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.6 kg

Bench Grinder

GBG 35-15
(0 601 27A 3L0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 350 W
No-load Speed	: 3,000 rpm
Disc Diameter	: 150 mm
Weight	: 10 kg

GBG 60-20
(0 601 27A 4L0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 600 W
No-load Speed	: 3,800 rpm
Disc Diameter	: 200 mm
Weight	: 17 kg

GSR 6-25 TE
(0 601 445 0P0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 701 W
Self-tapping Screws	
Diameter	: 6 mm
No-load Speed	: 0 - 2,500 rpm
Max. torque	: 20 Nm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

GSR 6-45 TE
(0 601 445 1P0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 701 W
Self-tapping Screws	
Diameter	: 6 mm
No-load Speed	: 0 - 4,500 rpm
Max. torque	: 12 Nm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

GRW 12 E
(0 601 1A7 070)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 1,200 W
Connector Type	: M14 Inside Thread
Max. Paddle Ø	: 140 mm
Incl. Paddle Ø	: 140 mm
No-load Speed	: 0 - 1,000 rpm
Nominal speed	: 0 - 620 min ⁻¹
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.3 kg

Jigsaw

GST 80 PBE
(0 601 581 59F)

HEAVY DUTY
1 year warranty



1 607 031 228

Capacity	
Power Input	: 580 W
In Wood	: 85 mm
In Metal	: 10 mm
No-load Stroke Rate	: 500 - 3,100 spm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.4 kg

GST 25 M
(0 601 516 0L0)

HEAVY DUTY
1 year warranty



1 607 031 228

Capacity	
Power Input	: 670 W
In Wood	: 80 mm
In Aluminium	: 25 mm
In Steel	: 15 mm
No-load Speed	: 500 - 2,600 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

Shear

GSC 2.8
(0 601 506 142)

HEAVY DUTY
1 year warranty



1 607 031 228

Capacity	
Power Input	: 500 W
In Steel	: 2.8 mm
In Aluminium	: 3.5 mm
No-load Stroke Rate	: 2,400 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

Nibbler

GNA 2.0
(0 601 530 103)

HEAVY DUTY
1 year warranty



1 607 031 228


Capacity	
Power Input	: 500 W
Mild Steel	: 2.0 mm
Stainless Steel	: 1.0 mm
No-load Stroke Rate	: 2,400 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.0 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

Sabre Saw

GSA 1100 E
(0 601 64C 8L0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 1,100 W
Cutting depth: In Wood	: 230 mm
In Metal	: 20 mm
No-load Stroke Rate	: 2,700 stroke/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.6 kg

Diamond Wheel Cutter

GDM 13-34
(0 601 36A 2L0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 1,300 W
Blade Diameter	: 110 mm
Max. Cutting Depth	: 34 mm
Base Plate	: 100 x 190 mm
No-load Speed	: 12,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.8 kg

Foam Cutter

GSG 300
(0 601 575 103)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 350 W
Cutting Capacity	: 300 mm
No-load Stroke Rate	: 3,200 spm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.6 kg

Circular Saw

GKS 66 X
(0 601 676 1L0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 1,200 W
Cutting Depth	: 66 mm
at 90°	: 47 mm
at 45°	: 47 mm
No-load Speed	: 4,900 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.4 kg

GKS 190
(0 601 623 0L0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 1,400 W
Blade Diameter	: 184 mm
Max. Cutting Capacities	
at 90°	: 67 mm
at 45°	: 48 mm
No-load Speed	: 5,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.1 kg

GKS 235 Turbo
(0 601 5A2 0L0)

HEAVY DUTY
1 year warranty




Capacity	
Power Input	: 2,050 W
Saw Blade Diameter	: 235 mm
Max. Cutting Capacities	
at 90°	: 85 mm
at 45°	: 65 mm
No-load Speed	: 0 - 5,300 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 7.6 kg

Mitre Saw

GCM 10 MX
(0 601 B29 0L0)


HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 1,700 W
Blade Size	: 255 mm
Arbour Size	: 25.4 mm
No-load Speed	: 4,800 rpm
Max Mitre	: 45° L / 52° R
Max. Cutting Capacity	: 89 x 89 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 13.5 kg

GCM 12 GDL
(0 601 B23 670)

HEAVY DUTY
1 year warranty




Capacity	
Power Input	: 2,000 W
Blade Size	: 305 mm
Arbour Size	: 30 mm
No-load Speed	: 3,800 rpm
Max. Mitre	: 52° L / 60° R
Cutting Capacity	: 104 x 341 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 32.1 kg

Cut-off Machine

GCO 14-24 J
(0 601 B37 2L0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 2,400 W
Saw Blade Diameter	: 355 mm
Saw Blade Bore	: 25.4 mm
No-load Speed	: 3,800 rpm
Cutting Capacity	
□	: 119 x 196 mm
□	: 119 x 119 mm
□	: 130 x 130 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 18.1 kg

Slide Mitre Saw

GCM 8 SJL
(0 601 B19 1L0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 1,600 W
Blade Size	: 216 mm
Bore Size	: 30 mm
No-load Speed	: 5,500 rpm
Max. Miter	: 52° L / 60° R
Cutting Capacity	: 70 x 312 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 17.3 kg

Mitre Saw Stand

T1B
(0 601 B12 310)



Capacity	
Length of Work Bench	
without Extension	: 1,220 mm
Length of Work Bench	
with extension	: 2,630 mm
Weight	: 15 kg / 19 kg

Table Saw

GTS 10 J
(0 601 B30 5L0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 1,800 W
Saw Blade Diameter	: 254 mm
Bevel Setting	: 47° L / 2° R
Cutting Capacity (right)	: 460 mm
(Left)	: 210 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 26 kg

Table Saw Stand

GTA 600
(0 601 B22 002)




Capacity	
Table Height	: 602 mm
Max. Length Extension	
Unfolded	: 450 x 520 (D x L)
Max. Load Capacity	: 60 kg
Weight	: 6.3 kg

Planer

GHO 10-82
(0 601 594 006)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 710 W
Planing Width	: 82 mm
Planing Depth	: 0 - 3.0 mm
No-load Speed	: 16,500 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

Eccentric Sander

GEX 125-1 A / GEX 125-1 AE
(0 601 387 0L0) / (0 601 387 5L0)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 250 W
No-load Speed	: 7,500 - 12,000 rpm
Oscillating Circuit	
Diameter	: 2.5 mm
Orbit Rate	: 15,000 - 24,000 opm
Sanding Plate	: 125 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.3 kg

Belt Sander

GBS 75 A
(0 601 274 004)

HEAVY DUTY
1 year warranty



Capacity	
Power Input	: 710 W
No-load Belt Speed	: 300 m/min
Sanding Surface	: 75 x 130 mm
Belt Size	: 75 x 533 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.2 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

Orbital Sander

GSS 1400
(0 601 2A2 0L0)



2 609 120 199

Capacity	
Power Input	: 180 W
No-load Speed	: 12,000 rpm
Orbital Rate	: 24,000 opm
Oscillating Circuit Dia.	: 1.6 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

GSS 230
(0 601 070 0L0)



2 609 120 199

Capacity	
Power Input	: 350 W
No-load Speed	: 12,000 rpm
Orbit Rate	: 24,000 opm
Sand Paper Size	: 92 x 182 mm
Clamping Velcro	: 93 x 230 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

GSS 280 AVE (Indent)
(0 601 292 971)



1 607 031 234

Capacity	
Power Input	: 350 W
No-load Speed	: 12,000 rpm
Orbit Rate	: 24,000 opm
Sand Paper Size	: 92 x 182 mm
Clamping Velcro	: 93 x 230 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

Polisher

GPO 12 CE
(0 601 389 0L0)



1 607 014 176

Capacity	
Power Input	: 1,250 W
No-load Speed	: 750 - 3,000 rpm
Polishing Disc Diameter	: 180 mm
Thread of Polishing Spindle	: M14
Tool Length	: 450 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.5 kg

Mini Router / Trimmer

GMR 1
(0 601 60A 0L0)



2 609 120 149

Capacity	
Power Input	: 550 W
Collet	: 6 mm or 1/4"
No-load Speed	: 33,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.5 kg

Router

GOF 1600 CE
(0 601 624 0L0)



2 610 007 957

Capacity	
Power Input	: 1,600 W
Toolholder	: 8 - 12,7 mm
No-load Speed	: 10,000 - 25,000 rpm
Max. Router Cage Stroke	: 76 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.8 kg

Hot Air Gun

GHG 600-3
(0 601 94B 006)



Capacity	
Power Input	: 1,800 W
Temperature	: 50 / 400 / 600°C
Air Flow	: 250 / 350 / 500 l/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 0.8 kg

GHG 630 DCE
(0 601 94C 706)



Capacity	
Power Input	: 2,000 W
Temperature	: 50 - 630°C
Air Flow	: 150 / 300 / 500 l/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 0.9 kg

Blower

GBL 800 E
(0 601 980 4L0)



1 604 321 129

Capacity	
Power Input	: 800 W
No-load Speed	: 16,000 rpm
Air Volume	: 4.5 m³/min
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

Wet & Dry Vacuum Cleaner

GAS 11-21
(0 601 97A 006)



Capacity	
Power Input	: 1,100 W
Container Volume	: 21 litre
Air Flow Max.	: 50 l/sec
Volume	: 150 mbar
Hose Diameter	: 35 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.3 kg

GAS 15 PS
(0 601 9E5 1L0)



Capacity	
Power Input	: 1,100 W
Container (gross/net)	: 15 / 8 litre
Air Flow Max.	: 33 l/sec
Max. Vacuum Pressure	: 22 kPa
Weight	: 6 kg
- Semi-automatic filter cleaning system, - 2 in 1: vacuuming and blowing	

High Pressure Washer

GHP 5-65
(0 600 910 5L0)



Capacity	
Motor Power	: 2,400 W
Maximum Pressure	: 160 Bar
Maximum Flow Rate	: 520 l/h
Hose Length	: 10 m
Voltage	: 220 - 240 V
Frequency	: 50 Hz
Weight	: 24 kg

Glue Gun

GKP 200 CE
(0 601 950 703)



Capacity	
Gluing Capacity	: 30 g/min
No. of Heating Elements	: 2
Warming Up Time	: 4 min
Glue Stick Length	: 200 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 0.4 kg

Rotary Hammer

GBH 2-23 REA
(0 611 250 570)



Capacity	
Power Input	: 710 W
In Concrete	: 4 - 23 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,000 rpm
Impact Rate	: 0 - 4,400 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight Without Dust Extraction	: 2.9 kg
Weight With Dust Extraction	: 3.6 kg

GBH 2-24 DRE
(0 611 272 1L4)



Capacity	
Power Input	: 790 W
In Concrete	: 4 - 24 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 920 rpm
Impact Rate	: 0 - 4,100 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.8 kg

GBH 2-26 DRE
(0 611 253 76C)



Capacity	
Power Input	: 800 W
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.7 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

Rotary Hammer

GBH 2-26 DFR
(0 611 254 76C)



Capacity	
Power Input	: 800 W
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 2.9 kg

GBH 2-28 DFV
(0 611 267 2L1)



Capacity	
Power Input	: 820 W
Impact Energy	: 3.2 J
In Concrete	: 4 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 5,100 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.1 kg

GBH 3-28 DFR
(0 611 24A 0L0)



Capacity	
Power Input	: 800 W
In Concrete	: 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.6 kg

GBH 4-32 DFR
(0 611 332 1L0)



Capacity	
Power Input	: 900 W
In Concrete	: 32 mm
In Steel	: 13 mm
In Wood	: 32 mm
No-load Speed	: 0-760 rpm
Impact Rate	: 0-3,600 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 4.7 kg

Rotary Hammer with SDS-Max

GBH 5-40 D
(0 611 269 0L0)



Capacity	
Power Input	: 1,100 W
Impact Energy (EPTA)	: 8.5 J
Max. App. in core cutter	: 90 mm
No-load Speed	: 170 - 340 rpm
Impact Rate	: 1,510 - 2,900 bpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg

GBH 5-40 DCE
(0 611 264 070)



Capacity	
Power Input	: 1,150 W
Impact Energy	: 2-11 J
Impact Rate	: 1,500-3,050 bpm
No-load Speed	: 170-340 rpm
Drilling Dia Concrete	: 12-40 mm
Vibration Values Drilling /Chiselling	: 10.5 / 7 / 5 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg

GBH 8-45 D
(0 611 265 1L0)



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Rated Speed	: 150 - 305 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

GBH 8-45 DV
(0 611 265 0L0)



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Vibration Values	
Drilling / Chiselling	: 8/7 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

Demolition Hammer

GSH 3 E
(0 611 320 703)



Capacity	
Power Input	: 650 W
Impact Rate	: 0-3,500 bpm
Impact Force	: 4.3 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.5 kg

GSH 5 (MAX)
(0 611 337 0L0)



Capacity	
Power Input	: 1,100 W
Impact rate	: 2,850 bpm
Impact Energy	: 7.5 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5.6 kg

GSH 5 CE
(0 611 321 0L0)



Capacity	
Power Input	: 1,150 W
Impact Rate	: 1,300 - 2,900 bpm
Impact Force	: 2 - 13 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.2 kg

GSH 9 VC
(0 611 322 0L0)



Capacity	
Power Input	: 1,500 W
Impact Force	: 13 J
Vibration Value	: 9.5 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 8.5 kg

GSH 11 E
(0 611 316 706)



Capacity	
Power Input	: 1,500 W
Impact Rate	: 900 - 1,890 bpm
Impact Force	: 6 - 25 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 10.1 kg

GSH 11 VC
(0 611 336 0L0)



Capacity	
Power Input	: 1,700 W
Impact Rate	: 900 - 1,700 bpm
Impact Force	: 23 J
Vibration Values Chiselling	: 8 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 11.4 kg

GSH 16-30
(0 611 335 1L0)



Capacity	
Power Input	: 1,750 W
Impact Rate	: 1,300 bpm
Impact Force	: 45 J
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 16.5 kg

GSH 27 VC
(0 611 30A 070)














Capacity	
Power Input	: 2,000 W
Impact Rate	: 1,000 bpm
Impact Force	: 69 J
Vibration Values Chiselling	: 8.5 m/s ²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 29.5 kg

* Bosch HEAVY DUTY Range Power Tools are entitled to 1 year warranty. Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 year warranty only applicable for purchases made from 1st June 2016 onwards. Terms and Conditions apply.

Rotary Hammers application overview

Masonry: ■ Optimal ■ Total range of all application














Concrete: ■ Optimal ■ Total range of all application

Products		Drilling diameter in concrete, masonry (mm)																												Drilling in wood (mm)				Drilling in steel (mm)	
		4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	up to 20	20-25	25-30	30-40	up to 10	10-13			
2 kg Hammers	 GBH 2-24 DRE Professional																																		
	 GBH 2-26 DRE Professional																																		
	 GBH 2-26 DFR Professional																																		
	 GBH 2-28 DFV Professional																																		
2 kg Cordless Hammers	 GBH 18 V-26 Professional																																		
	 GBH 36 V-LI PLUS Professional																																		
	 GBH 36 V-LI Compact Professional																																		
3 kg Hammer	 GBH 3-28 DFR Professional																																		
4 kg Hammer	 GBH 4-32 DFR Professional																																		
5 kg Hammer	 GBH 5-40 DCE Professional																																		
8 kg Hammer	 GBH 8-45 D / DV Professional																																		

■ Optimal ■ Possible

■ Optimal ■ Possible

● Drilling ● Chiselling

Drilling with hole saws in wood (mm)				Core cutting application in masonry, concrete (mm)				Material for drilling						Other characteristics		
up to 30	30-40	40-50	50-70	40-68	68-82	82-90	90-150	Reinforced concrete, granite, stone	Concrete	Bricks, hollow blocks	Hard wood	Soft wood	Metal	Drilling/ Chiselling ratio	Working direction	Special features
■	■			■				■	■	■	■	■	■	● 90% ● 10%	↕	
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	Quick change chuck
■	■	■		■	■			■	■	■	■	■	■	● 90% ● 10%	↕	Quick change chuck 
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	  
■	■	■		■				■	■	■	■	■	■	● 90% ● 10%	↕	 
■	■	■		■				■	■	■	■	■	■	● 100%	↕	  
■	■	■		■	■			■	■	■	■	■	■	● 80% ● 20%	↕	Quick change chuck 
■	■	■		■	■	■		■	■	■	■	■	■	● 70% ● 30%	↕	Quick change chuck 
				■	■	■		■	■	■				● 60% ● 40%	↕	
				■	■	■	■	■	■	■				● 50% ● 50%	↕	 Anti Vibration for GBH 8-45 DV only

Demolition Hammers application overview

■ Optimal ■ Possible

		Specification								
		Power	Weight	Impact energy	Tool holder	Working direction	Wall tile removal	Floor tile removal	Joint repair (removal of excess concrete)	De-plastering (removing cement plaster from the walls)
										
	GSH 3 E Professional	650 W	3.5 kg	4.3 J			■	■	■	■
	GSH 5 Professional	1100 W	5.6 kg	7.5 J			■	■	■	■
	GSH 500 Professional	1025 W	5.5 kg	6.8 J	17 mm Hex		■	■	■	■
	GSH 5 CE Professional	1150 W	6.2 kg	2-13 J			■	■	■	■
	GSH 9 VC Professional	1500 W	8.5 kg	13 J			■	■	■	■
	GSH 11 E Professional	1500 W	10.1 kg	6-25 J				■	■	■
	GSH 11 VC Professional	1700 W	11.4 kg	23 J				■	■	■
	GSH 16-30 Professional	1750 W	16.7 kg	45 J	30 mm Hex					
	GSH 27 VC Professional	2000 W	29.5 kg	69 J	28 mm Hex					
Accessories		Pointed chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30				■	■	■	■
		Flat chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30				■	■	■	■
		Tile chisel	SDS plus/SDS max				■	■		
		Spade chisel	SDS plus/SDS max/Hex 28/Hex 30				■	■	■	■
		Gouging chisel	SDS plus/SDS max							
		Bush hammer head	SDS max							
		Asphalt cutter	SDS max							
		Tamping plate	SDS max/Hex 28/Hex 30							
		Excavation chisel	SDS max/Hex 30							

Application										
Roughing of concrete walls, columns	Wall chasing or groove cutting on masonry, cement blocks, concrete walls	Concrete wall corrections	Column & beam corrections (removing bulge, exposing reinforcements)	Making cut outs or breaches in masonry wall	Hacking of concrete & masonry walls (heavy duty)	Demolition of concrete floor, slabs	Foundation breaking, pavement breaking	Road works (Restoration of Asphalt coverings)	Digging in hard compacted soil	Compacting earth & gravel
	■									
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■			■	■	■	■	■	■		
■			■	■	■	■	■	■		
						■	■	■	■	■
		■	■	■	■	■	■	■		
	■	■	■	■	■	■	■	■	■	
	■									
■								■		
										■
									■	

Dust Extraction System

Dust Cup (1 600 A00 D6H)

USP Extensive compatibility

Corrugated tube material

USP transparent plastic closed-cone cup


- for better drill bit tip visibility while drilling
- for more effective dust collection especially while drilling horizontally

Fast work and convenient storage

Long lasting device

Extra dust protection of the hammer chuck thanks to 2.5mm rubber inner plate

USP Versatile drilling possible to drill with bits L160/210mm

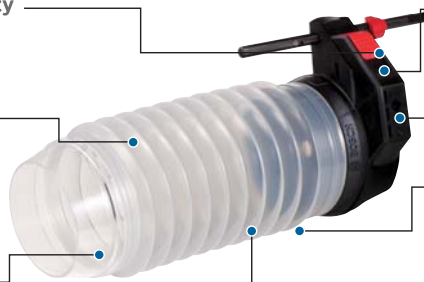

Compatible to all Bosch SDS-Plus Hammers

Cordless Hammers: GBH 180-LI, GBH 36 V-EC Compact, GBH 36 V-Li Plus

2 kg Hammers : GBH 2-24 DRE, GBH 2-26 DRE, GBH 2-26 DFR, GBH 2-28 DFV

3-4 kg Hammers : GBH 3-28 DFR, GBH 4-32 DFR

GDE 16 Plus (1 600 A00 15Z)

Complete Solution together with Rotary Hammer + Bosch Vacuum Cleaner



Cordless Hammers

or



2 kg Hammers

or



3-4 kg Hammers



GAS 15 PS



GDE 16 Plus Capacity

SDS-Plus Drilling Diameter	: 4 - 16 mm
Max. Drilling Depth (in one go)	: 120 mm
Work Length of Drill Bits	: 50 - 150 mm
Max. Core Cutter Diameter	: 82 mm
Weight (w/o handle)	: 0.52 kg

Contractor's Choice Range



18V Cordless

2

Contractor's Choice Range

GLI 180-LI (Solo)
Cordless Worklight
(0 601 4A1 1L0)**



RSP:
RM129*

Capacity	
Voltage	: 18 V
Brightness in Lumen	: 300 Lm
No. of LED	: 6 Qnt
Runtime	: 300 min / Ah
Dimensions	: 116 x 78 x 163 mm
Weight	: 0.30 kg

**GSR 180-LI
Cordless Drill / Driver
(0 601 9F8 1L0)**



RSP:
RM499*

Capacity	
Battery Voltage	: 18 V / 1.5 Ah
Chuck Capacity	: 13 mm
Clutch Setting	: 20 + 1
No-load Speed (1st/2nd gear)	: 0 - 450 rpm/0 - 1,700 rpm
Torque Settings	: 20+1
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel	: 35 / 10 mm
Weight	: 1.0 kg

**GSB 180-LI
Cordless Impact Drill
(0 601 9F8 3L0)**



RSP:
RM549*

Capacity	
Battery Voltage	: 18 V / 1.5 Ah
Chuck Capacity	: 13 mm
Torque (Hard / Soft)	: 54/ 21 Nm
No-load Speed (1st / 2nd gear)	: 0 - 450/0 - 1,700 rpm
Impact Rate	: 0 - 27,000 min
Max Screw Dia.	: 10 mm
Max Drilling Wood / Steel / Masonry	: 35 mm/10 mm/8 mm
Charger	: AL 1814 CV

**GDS 250-LI
Cordless Impact Wrench
(0 611 9G6 1L0)**



RSP:
RM619*

Capacity	
Battery Voltage	: 18 V / 3.0 Ah
Charger	: AL 1820 CV
Max Torque	: 250 Nm
No-load Speed	: 0 - 2,400 1/min
Impact Rate	: 0 - 3,300 bpm
Tool Holder	: 1/2" Square (Pin Hole + Retention Ring)
Screw Size	: M10 - M18

**GBH 180-LI (3 Mode)
Cordless Rotary Hammer
(0 611 911 0L2)**



RSP:
RM999*

Capacity	
Impact Force	: 1.7 J
No-load Speed	: 0 - 1,800 rpm
Impact Rate	: 0 - 4,550 bpm
Drilling Capacity Concrete	: 20 mm
Battery Voltage	: 18 V / 3.0 Ah
Charger	: AL 1820 CV
Weight	: 2.6 kg

12V Cordless

**GSR 120-LI
Cordless Drill / Driver
(0 601 9F7 0L0)**



RSP:
RM339*

Capacity	
Battery Voltage	: 12 V / 1.5 Ah
Chuck Capacity	: 0.8 - 10 mm
Clutch Setting	: 15 + 1
No-load Speed (1st gear)	: 0 - 430 rpm
(2nd gear)	: 0 - 1,600 rpm
Max. Torque (Hard / Soft)	: 28 / 11 Nm
Max Screw Dia.	: 7 mm
Max Drilling Wood / Steel	: 19 / 6 mm
Weight	: 1.0 kg

**GSB 120-LI
Cordless Impact Drill
(0 601 9F3 0L3)**



RSP:
RM379*

Capacity	
Battery Voltage	: 10.8 V / 1.5 Ah
Max. Torque (Hard / Soft)	: 28 / 11 Nm
No-load Speed	: 0 - 400 / 1,300 rpm
Impact Rate	: 18,750 bpm
Max Screw Dia.	: 7 mm
Chuck Capacity	: 10 mm
Weight	: 1.1 kg

**GDR 120-LI
Cordless Impact Driver
(0 601 9F0 0L1)**



RSP:
RM429*

Capacity	
Battery Voltage	: 12 V / 1.5 Ah
Max. Torque Hard	: 100 Nm
No-load Speed	: 0 - 1,300 / 1,600 rpm
Impact Rate	: 2,800 - 3,400 bpm
Max Screw Dia.	: 7 mm
Bit Holder	: 1/4"
Charging Time	: 90 mins
Weight	: 1.05 kg

* Recommended Selling Prices (RSP) are inclusive 6% GST. Subject to change without prior notice.

Valid in West Malaysia and while stocks last only.

** Solo - Bare Tools Only, Batteries, Charger and L-BOXX to Order Separately.

20

GST 700
Jigsaw
(0 601 2A7 0L0)

NEW!

RSP:
RM299*



Capacity	
Power Input	: 500 W
Stroke Rate	: 1,450 - 3,200 spm
Cutting Depth in Wood	: 70 mm
Stroke Length	: 20 mm
Weight	: 2.1 kg

GPO 950
Polisher
(0 601 3A2 0L0)

NEW!

RSP:
RM499*




Capacity	
Power Input	: 950 W
Adaptor Size	: M14 / M16
Rubber Sanding Plate, Diameter	: 180 mm
Variable Speed	: 600 - 2,100 rpm
Weight	: 5.5 kg

GWS 060
Angle Grinder
(0 601 375 6L0)



RSP:
RM129*




1 619 P07 571

Capacity	
Power Input	: 670 W
No-load Speed	: 12,000 rpm
Grinding Spindle Thread	: M10
Disc Diameter	: 100 mm
Weight	: 1.6 kg

GBM 350
Drill
(0 601 1A9 5L0)



RSP:
RM149*




1 619 P20 086

Capacity	
Power Input	: 350 W
In Steel	: 10 mm
In Wood	: 20 mm
No-load Speed	: 2,800 rpm
Weight	: 1.2 kg

GBM 320
Drill
(0 601 1A4 5L0)



RSP:
RM159*




1 619 PA4 619

Capacity	
Power Input	: 320 W
In Steel	: 6.5 mm
In Aluminium	: 13 mm
In Wood	: 6.5 mm
No-load Speed	: 4,200 rpm
Weight	: 1.0 kg

GDM 121
Diamond Cutter
(0 601 395 0L0)

RSP:
RM259*



1 619 PA4 025

Capacity	
Power Input	: 1,250 W
No-load Speed	: 14,500 rpm
Cutting Depth (at 90°)	: 34 / 36 mm
Cord Length (rubber)	: 2.1 m
Weight	: 2.8 kg

GHO 6500
Planer
(0 601 596 0L0)

RSP:
RM299*



2 609 120 398

Capacity	
Power Input	: 650 W
No-load Speed	: 16,500 rpm
Adjustable Chip Thickness	: 0 - 2.6 mm
Adjustable Rebating Depth	: 0 - 9 mm
Weight	: 2.8 kg

GKS 7000
Circular Saw
(0 601 676 0L0)

RSP:
RM399*



1 619 P10 063

Capacity	
Power Input	: 1,100 W
Saw Blade Diameter	: 184 mm
Cutting Depth (90°)	: 65 mm
Cutting Depth (45°)	: 47 mm
No-load Speed	: 5,200 rpm
Weight	: 3.6 kg

GKS 600
Circular Saw
(0 601 6A9 0L0)

RSP:
RM429*



Capacity	
Power Input	: 1,200 W
No-load Speed	: 5,000 rpm
Blade Bore Size	: 20 mm
Disc Diameter	: 165 mm
Cutting depth (90°/45°)	: 55 / 37 mm
Weight	: 3.6 kg

GCO 200
Cut-Off Saw
(0 601 B37 0L0)

RSP:
RM499*



1 607 014 171

Capacity	
Power Input	: 2,000 W
Cutting Capacity 0°	□ : 119 x 119 mm 45° □ : 110 x 110 mm
	○ : 129 mm ○ : 128 mm
	□ : 100 x 196 mm ○ : 107 x 115 mm
	□ : 130 x 130 mm □ : 115 x 115 mm
Saw Blade Bore	: 25.4 mm
Saw Blade Diameter	: 355 mm
No-load Speed	: 3,800 rpm
Weight	: 17 kg

GSH 500
Demolition Hammer
(0 611 338 5L0)

RSP:
RM699*



1 617 014 138

Capacity	
Power Input	: 1,025 W
Impact Rate	: 2,750 bpm
Impact Energy	: 6.8 J
No-load Speed	: 2,800 rpm
Weight	: 5.5 kg

Measuring Tools Range



Laser Rangefinder

GLM 30
(0 601 072 5K0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.15 - 30 m
Measuring Accuracy	: ± 2.0 mm
Measuring Units	: m / ft
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLM 40
(0 601 072 9K0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.15 - 40 m
Measuring Accuracy	: ± 2.0 mm
Measuring Units	: m / ft
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLM 500
(0 601 072 HK0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, cm, ft, in
Batteries	: 4 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLM 50 C
(0 601 072 CK0)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m, ft, in
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLM 80
(0 601 072 370)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 80 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: mm, cm, m, ft, in
Batteries	: Lithium-Ion
Weight	: 0.14 kg

GLM 150
(0 601 072 070)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 150 m
Measuring Accuracy	: ± 1 mm
Measuring Units	: mm, cm, m, ft, in
Batteries	: 4 x 1.5 V LR03(AAA)
Voltage	: 6 VDC
Weight	: 0.24 kg

GLM 250 VF
(0 601 072 170)



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range*	: 0.05 - 250 m
Measuring Accuracy	: ± 1 mm
Measuring Units	: m, cm, ft, in
Batteries	: 4 x 1.5 V LR03(AAA)
Weight	: 0.24 kg

Thermo Detector

GIS 1000 C
(0 601 083 340)



Capacity	
Laser Diode	: 635 nm, <1mW
Working Range*	: 0.1 - 5 m
Measuring Range*	: -40°C to +1000°C
Measuring accuracy	: ± 1.0°C (0°C - 100°C)
Batteries	: 4 x 1.5 V LR6(AA) / 10.8 V
Relative Humidity	: 0 - 100 %
Accuracy	: ± 2 %
Storage Medium	: 200 images
Weight	: 0.6 kg

Cordless Inspection Camera

GIC 120
(0 601 241 100)



Capacity	
Batteries	: 4 x 1.5 V (AA)
Display size	: 2.7"
Display Resolution	: 320 x 240 px
Dia. of camera head	: 8.5 mm
Length of camera cable	: 120 cm
Weight	: 0.5 kg

GIC 120 C
(0 601 240 2K0)



Capacity	
Batteries	: 4 x 1.5 V (AA) or 10.8 V-Li
Display size	: 3.5"
Display resolution	: 320 x 240 px
SD card storage	: Yes
Photo & video mode	: Yes
Dia. of camera head	: 8.5 mm
Length of camera cable	: 120 cm
Weight	: 0.6 kg

Detector

GMS 120
(0 601 081 000)



Capacity	
Max. Measuring Depth	: 120 mm
Live cables	: 50 mm
Wooden beams	: 38 mm
Metal (magnetic)	: 120 mm
Metal (non-magnetic)	: 80 mm
Batteries	: 1 x 9 V 6LR61
Weight	: 0.27 kg

D-tect 120
(0 601 081 3K0)



Capacity	
Detection Mode	: Universal, Concrete, Drywall
Detection Object	: Ferrous metals, non-ferrous metals, live cables, wooden objects and water-filled plastic pipes
Max. Detection Depth	: 120 mm
Accuracy	: ± 10 mm
Batteries	: 4 x 1.5 V LR6(AA) or 10.8 V
Weight, approx	: 0.5 kg

D-tect 150 SV
(0 601 010 008)



Capacity	
Max. Measuring Depth	: 150 mm
Accuracy	: ± 5 mm
Batteries	: 4 x 1.5 V LR6(AA)
Detectable Materials	: Plastic pipes, cables of all kinds, ferrous/non-ferrous metals, wood, cavities.
Weight	: 0.7 kg

Line Laser

GLL 1 P
(0 601 066 CB0)



Capacity	
Laser Diode	: 635-650nm, 1mW
Working Range*	: 5 m
Mount Thread Size	: 1/4"
Leveling Accuracy*	: ± 0.5 mm/m (at 0°)
Batteries	: 2 x 1.5 V LR03(AAA)
Weight	: 0.1 kg

GLL 3-80
(0 601 063 S00)



Capacity	
Laser Diode	: 640 nm, <1mW
Working Range*	: 30 m
Working Range	
With Receiver*	: 5 - 120 m (diameter)
Leveling Accuracy*	: ± 0.2 mm / m
Plane	: 3
Tripod Mount	: 1/4", 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.76 kg

GLL 3-15 X (Bare)
(0 601 063 M80)



Capacity	
Laser Diode	: 630 - 650 nm, <1mW
Working Range*	: 15 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Line Laser

GLL 5-50 X (Bare)
(0 601 063 N80)



Capacity	
Laser Diode	: 630 - 650 nm, <1mW
Working Range*	: 15 m
Working Range With Receiver*	: 5 - 50 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

Electronic Line Laser

GLL 5-40 E
(0 601 063 GB1)



Capacity	
Laser Diode	: 635 - 650 nm, <1mW
Working Range*	: 15 m
Working Range With Receiver*	: 40 m
Leveling Accuracy	: ± 0.1 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.1 kg

GLL 8-40 E
(0 601 063 HB1)



Capacity	
Laser Diode	: 635 - 650 nm, <1mW
Working Range*	: 15 m
Working Range With Receiver*	: 40 m
Leveling Accuracy	: ± 0.1 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.1 kg

Combi Laser

GCL 2-15 G
(0 601 066 J00)



Capacity	
Laser Diode	: 500 - 540 nm, <10mW, 635 - 650 nm, <1mW
Working Range*	: 10 m
Dust and splash protection	: IP 54
Leveling Accuracy	: ± 0.3 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4", 5/8"
Batteries	: 3 x 1.5 V LR6 (AA)
Weight	: 0.49 kg

GCL 2-50 CG
(0 601 066 H80)



Capacity	
Laser Diode	: 500 - 540 nm, <10mW, 635 - 650 nm, <1mW
Working Range*	: 50 m
Dust and splash protection	: IP 54
Leveling Accuracy	: ± 0.3 mm / m
Self-levelling Range	: ± 4°
Tripod Mount	: 1/4"
Batteries	: 4 x 1.5 V (AA) or Bosch Li-Ion 10.8 V / 12 V Li-Ion Battery
Weight	: 0.58 kg

Surface Laser

GSL 2
(0 601 064 002)



Capacity	
Working Range*	: 10 m
Working Range With Target Plate*	: 20 m
Leveling Accuracy*	: 0.3 mm/m
Self-levelling Range	: ± 4°
Batteries	: 10,8 V Li-Ion / 4 x 1.5 V LR6 (AA)
Weight	: 5.77 kg

Tile Laser

GTL 3
(0 601 015 200)



Capacity	
Laser Diode	: 635 nm, <1mW
Laser Class	: 2
Accuracy	: ± 0.2 mm / m
Accuracy between 45° and 90° - Line	: ± 0.4 mm / m
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

Rotation Laser

GRL 240 HV
(0 601 061 C40)



Capacity	
Laser Diode	: 635 nm, <1mW
Working Range*	: 30 m
Working Range With Receiver*	: 240 m (diameter)
Leveling Accuracy*	: ± 0.2 mm/m
Self-levelling Range	: ± 5°
Batteries	: 2 x 1.5 V LR20(D)
Receiver	: LR 24
Weight	: 1.8 kg

GRL 300 HVG
(0 601 061 703)



Capacity	
Laser Diode	: 532 nm, <5mW
Working Range*	: 50 m
Working Range With Receiver*	: 300 m (diameter)
Leveling Accuracy*	: ± 0.1 mm / m
Batteries	: 2 x 1.5 V LR20(D)
Receiver	: LR 1G
Weight	: 1.8 kg

Optical Level

GOL 26 D
(0 601 068 000)



Capacity	
Magnification	: 26x
Leveling Accuracy	: 1.6 mm / 30 m
Working Range	: 100 m
Deviation for 1 km double run leveling	: 1.5 mm
Dust and Splash Protection	: IP 54
Weight	: 1.7 kg

GOL 32 D
(0 601 068 500)



Capacity	
Magnification	: 32x
Leveling Accuracy	: 1 mm / 30 m
Working Range	: 120 m
Deviation for 1 km double run leveling	: 1.0 mm
Dust and Splash Protection	: IP 54
Weight	: 1.7 kg

Angle Measurer

GAM 220
(0 601 076 500)



Capacity	
Measurement Range	: 0 - 220°
Accuracy, Angles	: ± 0.1°
Leg Length	: 40 cm
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.3 kg

Digital Inclinometer

GIM 60 L
(0 601 076 900)



Capacity	
Measurement Range	: 0 - 360° (4 x 90°)
Laser working range	: 30 m
Electronics Measurement Accuracy 0° / 90°	: ± 0.05°
Electronics Measurement Accuracy at 1° - 89°	: ± 0.2°
Batteries (Grade measurement)	: 1 x 9V 6LR61 (Laser Operation) 2 x AAA LR03
Weight	: 0.9 kg

GIM 120
(0 601 076 800)



Capacity	
Measurement Range	: 0 - 360° (4 x 90°)
Electronics Measurement Accuracy 0° / 90°	: ± 0.05°
Electronics Measurement Accuracy at 1° - 89°	: ± 0.2°
Length	: 1250 mm
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 1.4 kg

Measuring Rail

R 60



Capacity	
Comes complete with	: Protective Case, Charger, Manufacturer's Certificate
Measuring Range	: 0 - 360°
Accuracy of inclinometer	: ± 0.2°
Audible Signals	: at 0° and 90°
Dimensions (L/W/H)	: 610 x 58 x 30 mm

Laser Receiver

LR 1G (for GRL 300 HVG)
(0 601 069 700)



Capacity	
Working Range	: 0 - 150 m
Measuring Accuracy (fine/rough)	: ± 1 mm / ± 3 mm
Dust and Splash Protection	: IP 65
Batteries	: 1 x 9 V 6LR61
Weight	: 0.36 kg

* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Laser Receiver

LR 5 (for GLL 5-40 E / GLL 8-40 E)
(0 601 069 G80)



Capacity

Working Range : 5 - 40 m
Batteries : 1 x 9 V 6LR61
Dust & Splash Protection : IP 54

LR 6 (for GLL 5-50 X / GLL 3-80)
(0 601 069 H00)



Capacity

Working Range : 5 - 50 m
Dust & Splash Protection : IP 54
Measurement Accuracy (fine/Rough) : ± 1 mm / ± 3 mm
Batteries : 2 x 1.5 V LR03 (AAA)
Weight : 0.2 kg

LR 7 (for GCL 2-50 CG / GLL 3-80)
(0 601 069 J00)



Capacity

Working Range : 5 - 50 m
Dust & Splash Protection : IP 54
Measurement Accuracy (fine/Rough) : ± 1 mm / ± 3 mm
Batteries : 2 x 1.5 V LR6 (AA)
Weight : 0.15 kg

LR 24 / LR 30 (for GRL 240 HV)
(0 601 069 213)



Capacity

Receivable Wavelength : 630 nm
Measuring Accuracy (fine/medium) : ± 1.5 mm / ± 3 mm
Dust and Splash Protection : IP 54
Batteries : 1 x 9 V 6LR61
Weight : 0.15 kg

Tripod

BT 150 (1/4")
(0 601 096 B00)



Capacity

Work Height : 55 - 157 cm
Tripod Thread : 1/4"
Weight : 1.3 kg

BT 150 (5/8")
(0 601 096 C80)



Capacity

Work Height : 52 - 154 cm
Tripod Thread : 5/8"
Weight : 1.1 kg

BT 160
(0 601 091 200)



Capacity

Work Height : 97 - 160 cm
Tripod Thread : 5/8"
Weight : 4.1 kg

BT 170 HD
(0 601 091 300)



Capacity

Work Height : 107 - 165 cm
Tripod Thread : 5/8" x 11
Weight : 5.5 kg

Optical Level Measuring Rod

GR 240
(0 601 094 100)



Capacity

Length : 2.4 m
Unit Of Measure : m / cm
Weight : 1.3 kg

GR 500
(0 601 094 300)



Capacity

Length : 5.0 m
Unit Of Measure : m / cm
Weight : 1.98 kg

BT 350 (c/w bracket & holder)
(0 601 015 B00)



Capacity

Max Height : 140 - 350 cm
Weight : 2.5 kg

Universal Holder

BM 1
(0 601 015 A01)



Capacity

Mount Thread : 1/4"
Weight : 0.5 kg

Bracket

Bracket (for LR 1, LR 1 G, LR 5)
(1 608 M00 70F)



Bracket (for LR 6)
(1 608 M00 C1L)



Accessories

RM 3 (for GCL 2-50 CG)
(0 601 092 800)



Capacity

Height : 120 mm
Length : 135 mm
Weight : 0.500 kg

* The working range can be decreased by unfavorable environment conditions (eg. Direct sun irradiation).

Home & Garden Range



High Pressure Cleaner

EasyAquatak 100
(0 600 8A7 EL0)

Easy

NEW!



Capacity	
Motor Output	: 1,200 W
Max. Pressure	: 100 bar
Max. Flow Rate	: 300 l/h
Max. Temp	: 40°C
Hose Length	: 3 m PVC
Voltage / Frequency	: 230 / 240 V / 50 / 60 Hz
Weight	: 3.0 kg

AQT 33-11 / EasyAquatak 110
(0 600 8A7 6L0) / (0 600 8A7 FL0)

Easy



Capacity	
Motor Output	: 1,300 W
Pressure	: 110 bar
Flow Rate	: 330 l/h
Max. Temp	: 40°C
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 3.8 kg

EasyAquatak 120
(0 600 8A7 9L0) / (0 600 8A7 9L1)

Easy



Capacity	
Motor Output	: 1,500 W
Pressure	: 120 bar
Flow Rate	: 350 l/h
Max. Temp	: 40°C
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 5 kg

UniversalAquatak 125
(0 600 8A7 AL0)

Universal



Capacity	
Motor Output	: 1,500 W
Pressure	: 125 bar
Flow Rate	: 360 l/h
Max. Temp	: 40°C
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 6.8 kg

UniversalAquatak 130
(0 600 8A7 BL0)

Universal



Capacity	
Motor Output	: 1,700 W
Pressure	: 130 bar
Flow Rate	: 380 l/h
Max. Temp	: 40°C
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 7.8 kg

AQT 42-13
(0 600 8A7 3L0)

Advanced



Capacity	
Motor Output	: 1,900 W
Pressure	: 130 bar
Flow Rate	: 420 l/h
Max. Temp	: 40°C
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 10.25 kg

AQT 45-14 X
(0 600 8A7 4L0)

Advanced



Capacity	
Motor Output	: 2,100 W
Pressure	: 140 bar
Flow Rate	: 450 l/h
Max. Temp	: 40°C
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 17.60 kg

AdvancedAquatak 150
(0 600 8A7 7L0)

Advanced



Capacity	
Motor Output	: 2,200 W
Pressure	: 150 bar
Flow Rate	: 490 l/h
Max. Temp	: 40°C
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 22.45 kg



Warranty

This serves to inform you that all **Bosch** Power Tools are guaranteed against manufacturing defects for a period of **6 months** from the registered date of purchase (**Bosch Measuring Tools, GHP Range High Pressure Washer, HEAVY DUTY Range Power Tools and DREMEL Products are entitled to 1 Year Warranty, Only Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers are entitled to 6 months warranty. 1 Year Warranty only applicable for purchases made from 1st June 2016 onwards. Term and Conditions apply**). For the same defect repair within warranty period, a maximum **3 times** warranty repair are allowed for **Bosch** Power Tools, **2 times** for **Bosch** Measuring Tools and **Bosch** Home & Garden Tools. This guarantee, however, does not cover damage caused by accident, misuse, unauthorised repairs, tampering, normal wear & tear, additions and modifications made to the tool in any manner. In case of complaint, please send the tool, undismantled together with official proof of purchase, i.e. **tax invoice or receipt stated with tool's serial no.**, to **Bosch Power Tools Authorised Service Centre**.


































Jaminan

Dimaklumkan bahawa tempoh jaminan untuk Alat-alat Kuasa **Bosch** akibat kecacatan produk semasa pengilangan adalah terhad kepada **6 bulan sahaja** bermula dari tarikh pembelian (**Alat Pengukur Bosch, Siri Pencuci Tekanan Tinggi GHP Bosch, Siri HEAVY DUTY Alat-alat Kuasa Bosch dan DREMEL Produk tempoh jaminannya 1 Tahun. Hanya Alat Pengereng Bosch, Bateri Bosch dan Pengecas Bateri Bosch Tempoh Jaminannya 6 bulan. Tempoh Jaminan 1 Tahun hanya untuk pembelian bermula dari 1hb Jun 2016. Tertakluk kepada Terma dan Syarat**). Jumlah maksimum pembaikan dalam tempoh jaminan adalah terhad kepada **3 kali** sahaja untuk Alat-alat Kuasa **Bosch, 2 kali** sahaja untuk Alat-alat Pengukur **Bosch** dan Alat-alat Kuasa Halaman **Bosch**. Tempoh jaminan ini tidak tertakluk kepada kerosakan akibat kemalangan, penyalahgunaan, membaikpulih yang tidak diakui, haus yang sepatut ada dan pengubahsuaian yang mengakibatkan kerosakan Alat-alat kuasa tersebut. Bagi sebarang pengaduan, sila hantar Alat-alat Kuasa dan **tax invoice rasmi** atau resit rasmi sebagai bukti pembelian yang dilengkapi dengan nombor siri Alat-alat Kuasa ke **Pusat Servis Alat-alat Kuasa Bosch Yang Sah**.


保证


谨此通知阁下有关所有博世电功工具享有为期六个月之生产损坏保证, 有效期从购买登记日算起 (**博世测量仪器, 博世 GHP 高压清洗机系列, 博世 HEAVY DUTY 系列及 DREMEL 产品享有1年保证, 除了博世热风机, 博世电池和博世充电器享有6个月保证. 1年保证有效期从 1-6-2016 选购开始. 附带条规**). 在维修保证期间, 博世电动工具享有高达三次维修, 博世测量仪器及博世家园电动工具享有两次维修. 无论如何, 上述保证并不包括有关电功工具因意外、错误使用、非授权维修、正常的磨损、附加及修换或其他方式所造成的损坏及故障. 若有任何投诉, 请将阁下完整的电功工具和**购买税务发票**或付款收据及具备电功工具编号交到您的**博世电动工具授权维修中心**.


Key To Symbols

 Electronic Control	 Rotation Stop	 Constant Electronic	 Forward / Reverse Rotation	 Overload Clutch	 Slim Grip	 INOX For a perfect finish on stainless steel
 Spindle Lock	 Saw Blade Pendulum Action	 Dust Extraction	 Bosch SDS System	 SDS-Plus Tool Holder	 Fine Depth Adjustment	 Distortion-resistant protective guard
 SDS-Max Tool Holder	 SDS-Plus Quick Exchange System	 SDS-Max Quick Exchange System	 Bosch SDS SDS-Clic Quick Clamping System	 Velcro Fastening	 EASY-FIT Easy Fit	 KICK BACK STOP Kick Back Stop
 Turbo Blower	 Removable Cable	 Torque Control	 Restart Protection	 Direct Cooling and Additional Air Inlets	 EC brushless motor Brushless EC Motor	 Vibration Control Vibration Control
 AUTO LOCK Auto-Lock	 WOOD RAZOR Woodrazor	 TURBO POWER Turbo Power	 LASER 2 LASER Class 2	 LASER 3R LASER Class 3R		

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only. The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.

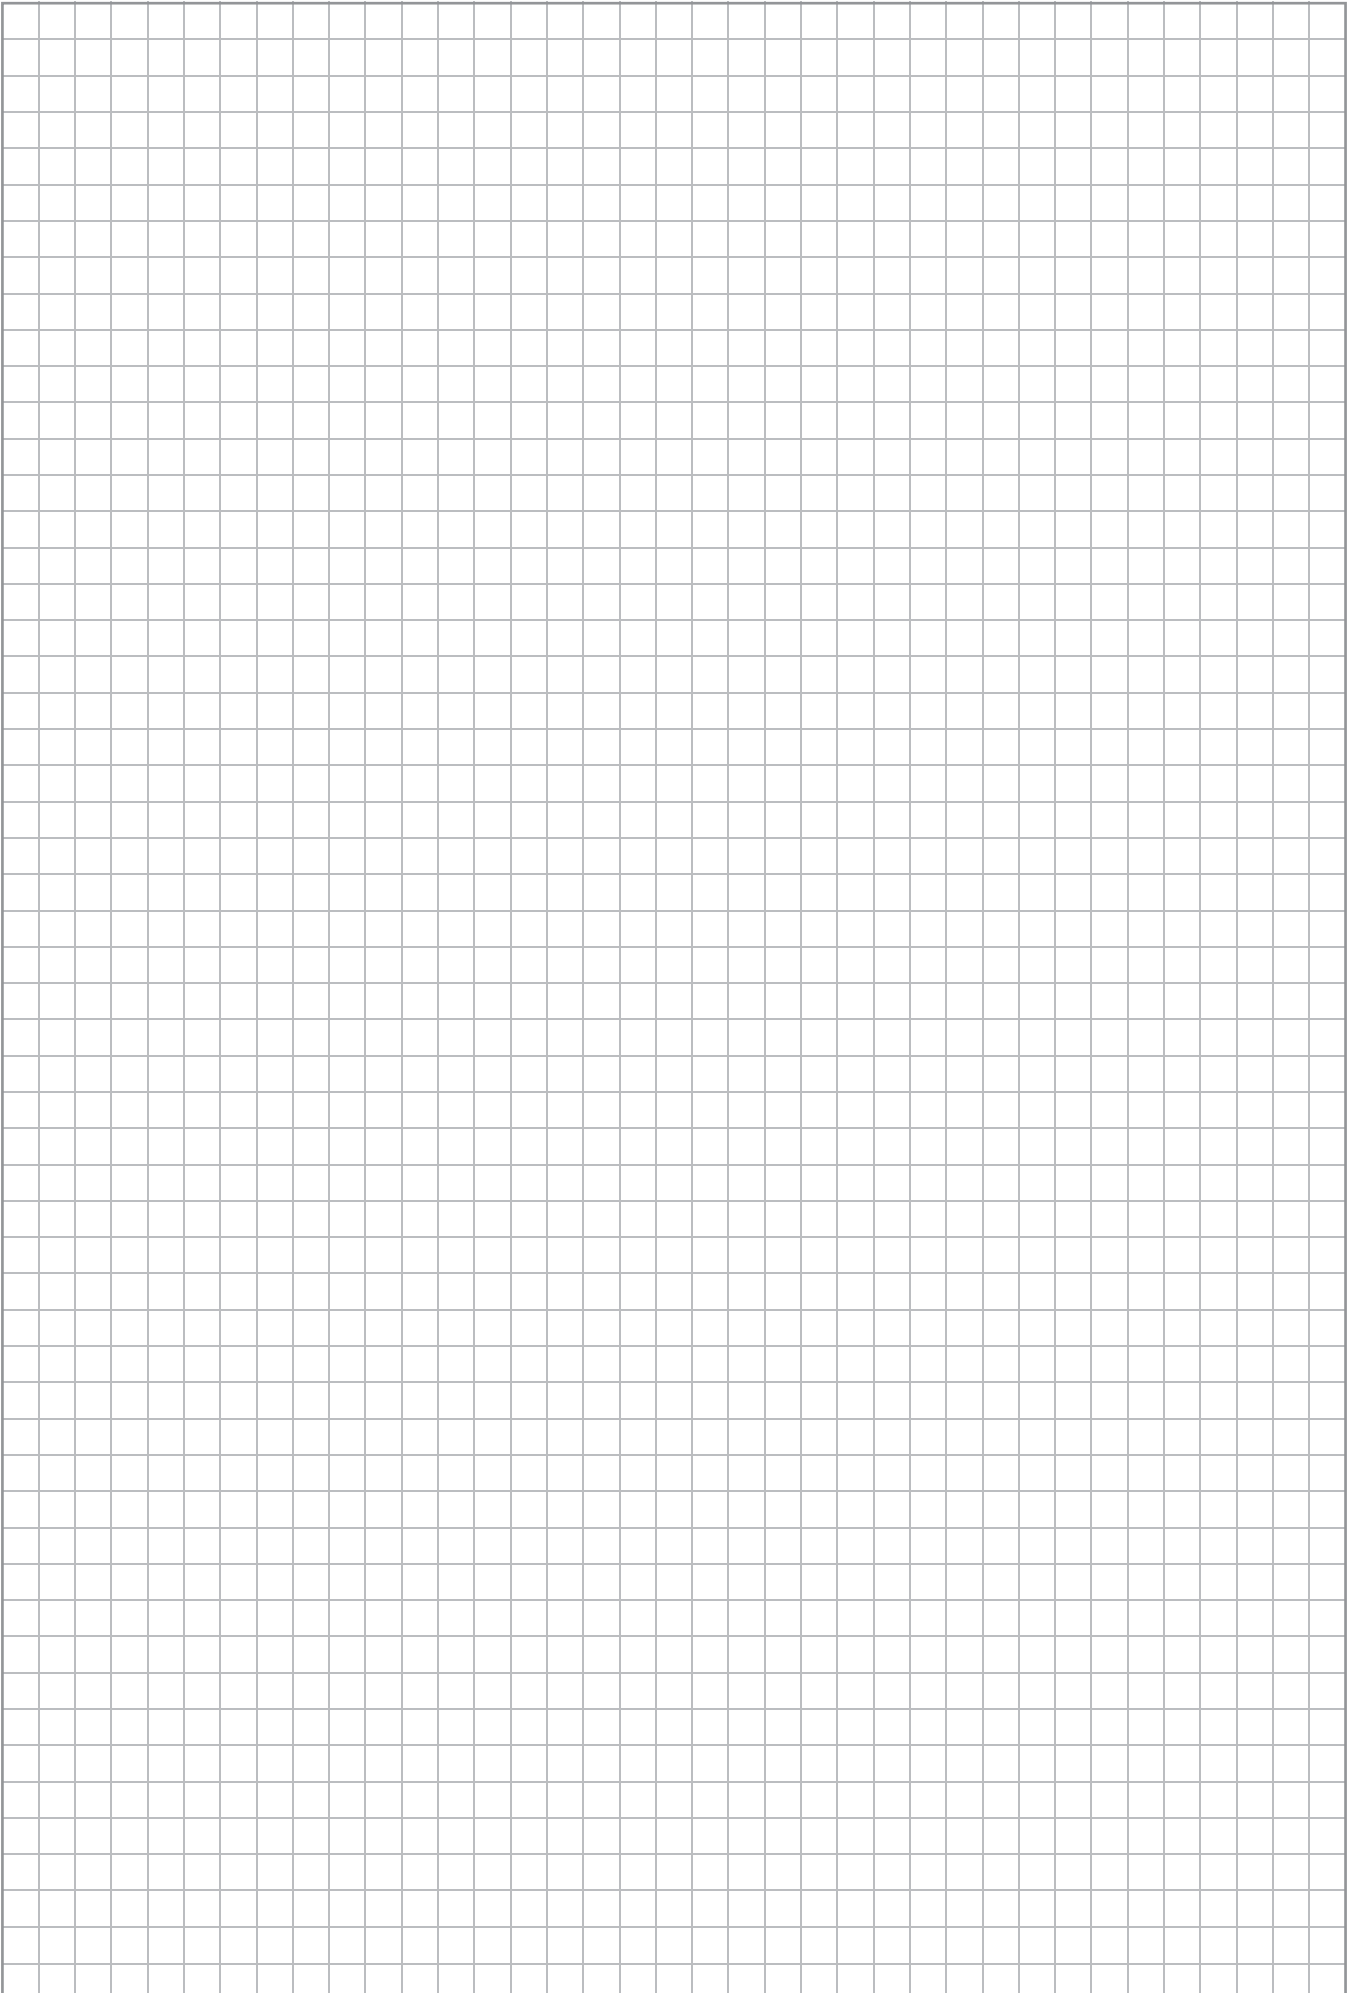

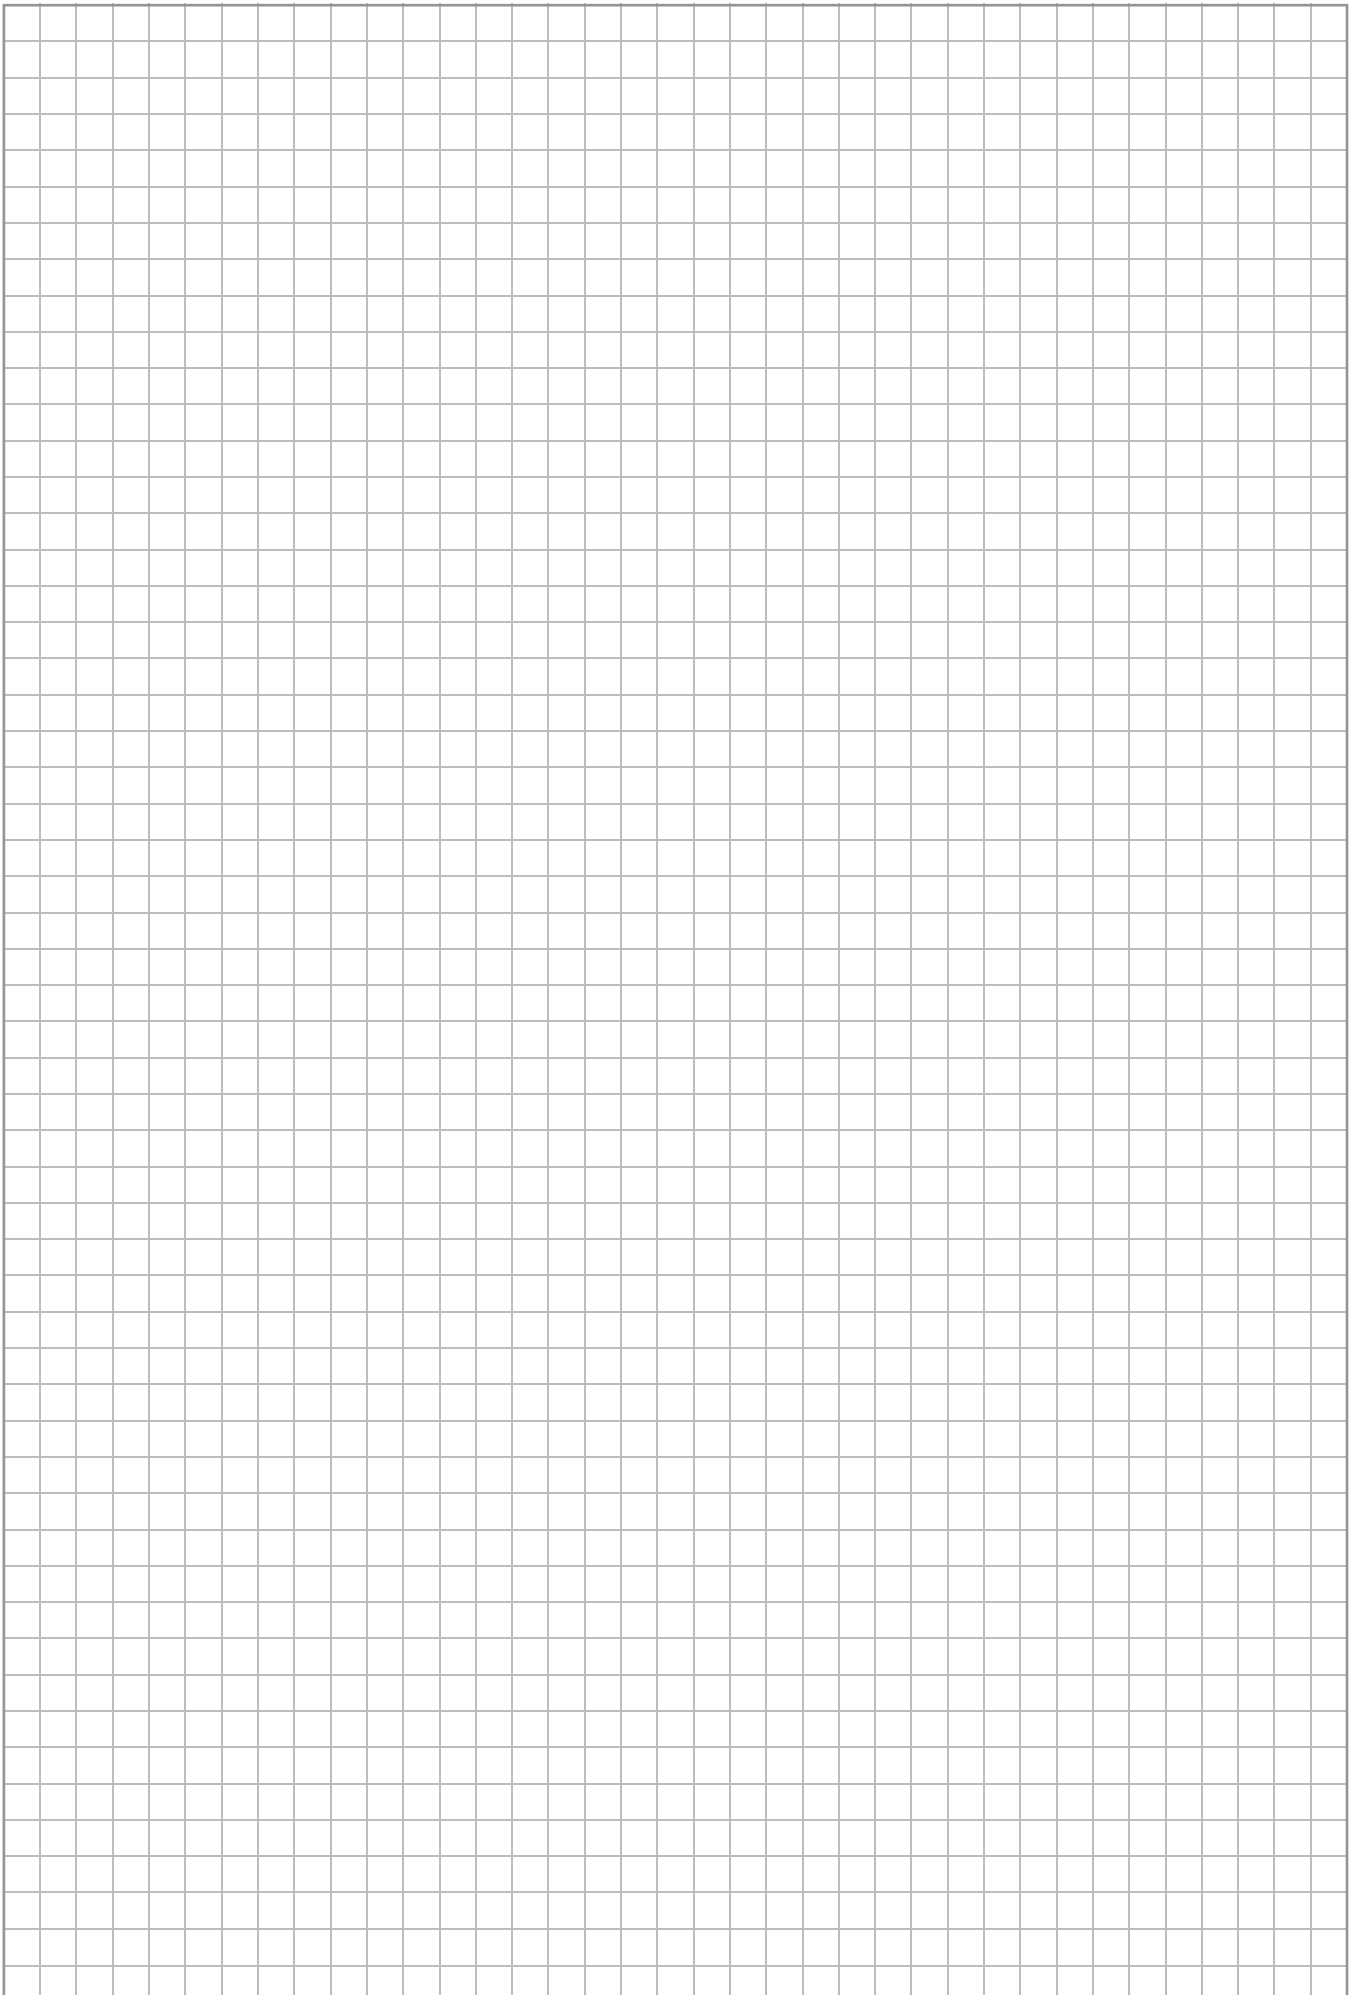

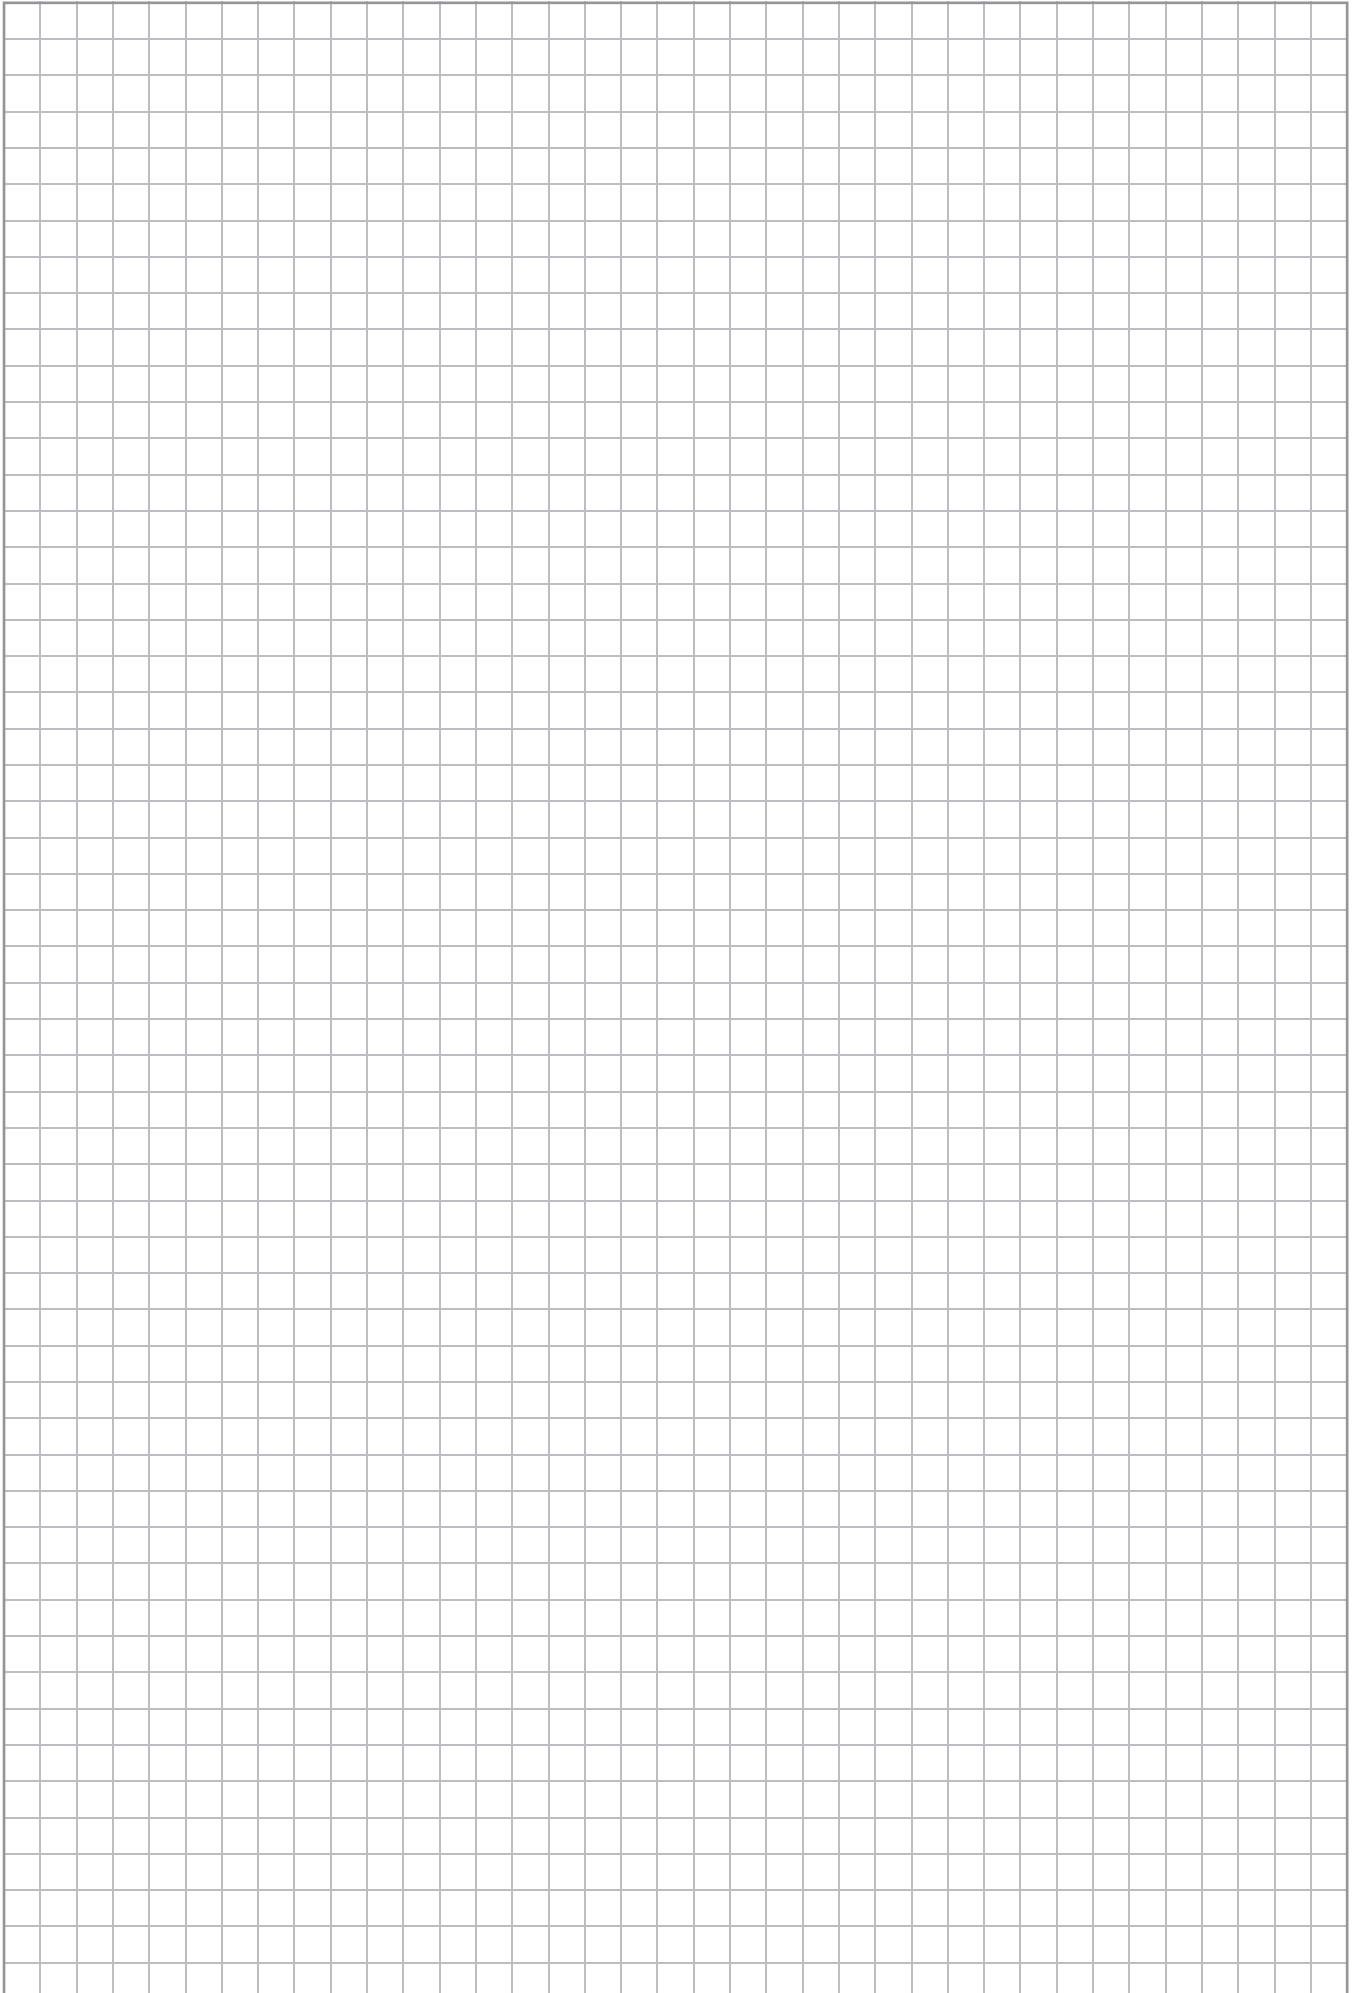



Authorised Service Centres

TK JAYA AUTO TRADING
57, Rumah Kedai Perumahan Awam Mergong,
Jalan Sepat 1, 05150 Alor Star, Kedah.
Tel: 04 - 734 4550 Fax: 04 - 734 4550

SYARIKAT CHANG TRADING
3566-H&J, Jalan Sultanah Zainab,
15050 Kota Bharu, Kelantan.
Tel: 09-748 4237 Fax: 09-744 9671

CHAN YEE AUTO ELECTRIC SERVICE
6323, Jalan Kampung Paya,
12200 Butterworth, Pulau Pinang.
Tel: 04 - 332 8496 Fax: 04 - 323 7760

HINES SOLUTION
83, Jalan C. Y. Choy,
10300 Georgetown, Pulau Pinang.
Tel: 04 - 263 2136 Fax: 04 - 262 1909

KIM HENG MOTOR ELECTRICAL SERVICE
30, Kawasan Perindustrian Batu 3,
Jalan Gambang, 25150 Kuantan, Pahang.
Tel: 09-513 5662 Fax: 09-514 2430

ENG SOON ELECTRIC TRADING CO.
No. 235, Jalan Bercham, Taman Desa Kencana,
31400 Ipoh, Perak.
Tel: 05-546 9487 Fax: 05-546 6181

FOREVER TOOLS SERVICES
24, Jalan Chenderuh 2, Off Jalan Ipoh Batu 4 1/4,
51200 Kuala Lumpur.
Tel: 03 - 6252 9918 Fax: 03 - 6252 8918

TOOLS HAUS SDN BHD
G22, Jalan Puteri 4/8, Bandar Puteri Puchong,
47100, Selangor.
Tel: 03 - 8066 2635 Fax: 03 - 8051 2632

MENG TAT MACHINERY SERVICE
181, Batu 1 1/4, Off Jalan Kapar,
41400 Klang, Selangor.
Tel: 03 - 3343 0951 Fax: 03 - 3344 4419

SIN SONG SDN BHD
No. 5, Jalan Melur 1, Taman Melur,
85000 Segamat, Johor.
Tel: 07 - 943 4380 Fax: 07 - 943 4195

ANN TAT TRADING
367-C, Jalan Melor 2, Taman Peringgit Jaya,
75400 Melaka.
Tel: 06 - 284 1878

HENG LEE POWER TOOLS SERVICES
2, Jalan Dato Suleiman Mohd Noor,
Kluang Baru, 86000 Kluang, Johor.
Tel: 019 - 722 8446 Fax: 07 - 772 2712

VINCO POWER TOOLS SERVICES
7, Jalan Teratai 10, Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07 - 353 2433 Fax: 07 - 357 7621

CMW ENGINEERING (SABAH) SDN BHD
Lot No. 9, Likas Realty, Mile 5 1/2,
Tuaran Road, Likas Industrial Centre,
88450 Likas, Kota Kinabalu, Sabah.
Tel: 088 - 389 922 Fax: 088 - 426 109

CMW ENGINEERING CORPORATION SDN BHD
10, Lot 1549, Block 10 KYLD,
2 1/2 Miles Rock Road, 93250 Kuching, Sarawak.
Tel: 082 - 420 141/151 Fax: 082 - 411 335



BOSCH
Invented for life

Robert Bosch Sdn Bhd (220975-V)
No. 8A, Jalan 13/6, 46200 Petaling Jaya, Selangor Darul Ehsan, Malaysia.
Tel: +603 - 7966 3000 Fax: +603 - 7958 3838
www.bosch-pt.com.my



Scan to download the
Bosch Toolbox App



Bosch Professional Power Tools and Accessories

For further enquiries, please contact

1 800 880 188

Mon - Fri 9am - 6pm